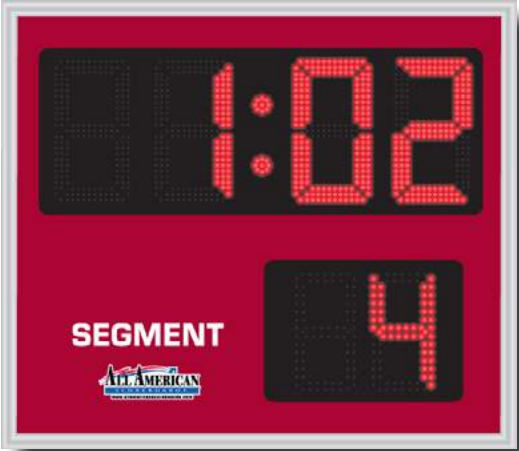



<b>INDOOR/OUTDOOR          SCOREBOARD</b>  <b>8006</b> <b>Segment Timer</b>	
<b>OVERALL DIMENSION</b>	3' high x 3.5' wide x 5" deep.
<b>INFORMATION DISPLAYED</b>	Timer, Segment.
<b>DIGITS</b>	Bright Red 7-Segment LEDs.
<b>GAME TIME</b>	12" High Red Digits, Shall register 0:00 - 99:59, 1/10 second capable. Amber LEDs available.
<b>SHOT CLOCK TIME</b>	10" High Red Digits, Shall register 0-99. Amber LEDs available.
<b>CONSTRUCTION</b>	5" extruded aluminum frame, .093" thick. Face panels made from shatter resistant polycarbonate (Black, Navy, Blue, Bright Blue, Purple, Burgundy, Red, Forest Green, Green, custom colors available).
<b>ELECTRONICS</b>	100% solid state, microprocessor controlled system.
<b>HORN</b>	Includes horn (100 dB @ 10 Feet).
<b>SERVICING</b>	Front access for ease of servicing. Plug in modules for ease of replacement.
<b>MICROPROCESSOR CONTROL          CONSOLE</b> 	Extruded Aluminum, high impact low profile microprocessor control console, latest state of the art, user friendly. Size: 13.25" wide x 5" high x 9" deep. Weight: 6 lbs. Microprocessor to be supplied with 25 feet of cable (hardwire). Microprocessor control console with membrane keyboard provides for direct entry of all information. Radio Control is available. Small radio remote is also available and can be run in tandem with console.
<b>SEGMENT PROGRAM</b>	Smart program allows segments to be run as one continuous workout or run as a series of segments within a workout. Continuous segment allows the entire workout time to be displayed while the segment time counts. Segment mode displays segment time and segment number and may count both up and down within a single workout. Program and save up to 20 workouts, each consisting of up to 99 unique segments. Short horn (included) may sound inbetween segments - a long horn may sound at the end of a workout. Horn may be programmed to blow at certain times or remain silent.
<b>JUNCTION BOX</b>	One junction box 5" x 3" with cover and plug. (Hardwire)
<b>DATA CABLE</b>	Twisted pair, direct burial, RJ45 Connectors.
<b>POWER REQUIREMENTS</b>	120VAC. Minimum one 15A circuit is recommended.
<b>INSTALLATION</b>	May be mounted to nearly any wall surface, or to Backboard.
<b>WEIGHT</b>	Net 40 lbs / Shipping 55 lbs (each).
<b>WARRANTY</b>	Five year guarantee against defects in materials and workmanship. Factory repair service for parts in warranty. Union label.