


INDOOR SHOT CLOCK 8299

Basketball

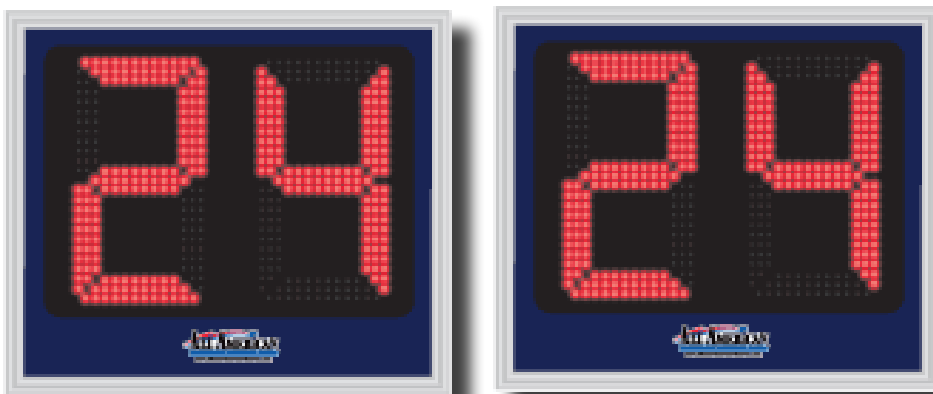

OVERALL DIMENSION

2' high x 2'2" wide x 4.75" deep (Sold Individually).

INFORMATION DISPLAYED

Shot Time

DIGITS

14" Bright Red and Amber, 7-Segment LEDs.

INDICATORS

None.

CAPTIONS

None.

HORN

Includes internal 80dB tone horn. Internal 93 dB vibrating horn (EL00898P) available.

CONSTRUCTION

4.75" extruded aluminum frame, .093" thick. Faces made from shatter proof polycarbonate.

STANDARD COLORS (Custom Colors Available)



ELECTRONICS

100% solid state, microprocessor controlled system.

SERVICING

Front access for ease of servicing. Plug in modules for ease of replacement.

MICROPROCESSOR CONTROL CONSOLE



Sold separately. Extruded Aluminum, high impact low profile microprocessor control console, latest state of the art, user friendly. Size: 13.25" wide x 5" high x 9" deep. Weight: 6 lbs. Microprocessor to be supplied with 25 feet of cable (hardwire). Microprocessor control console with membrane keyboard provides for direct entry of all information. Radio Control is available.

JUNCTION BOX

One dual-system capable junction box, 4" x 2" with cover and ethernet cable. (Hardwire)

DATA CABLE

Twisted pair, direct burial, RJ45 Connectors (Hardwire).

POWER REQUIREMENTS

115/230 VAC. 50/60 Hz. Minimum one 20A circuit is recommended.

INSTALLATION

May be mounted to nearly any wall surface or to nearly any backboard structure.

WEIGHT

Net 30 lbs / Shipping 70 lbs (each) , 115 lbs (pair).

WARRANTY

Five year guarantee against defects in materials and workmanship. Factory repair service for parts in warranty. Union label. UL Certified.

STANDARD VARIATIONS - Add suffix to model number in order that they appear below (see examples on next page)

Model + SCS

With shot clock strips built into the face of the shotclock, used for shot time expiration.

Model + L

Manufactured with the power supplies and connections required to run AAS lightstrips installed on backboards (Standard Model #8290BBS, Sold Separately), traditionally used for end of game lights.

Model + -3

3-Sided Shotclock.

Model + RV2

Radio upgrade. 2.4 GHz spread spectrum, 1500' expected range.

EXAMPLES OF VARIATIONS

This page shows samples of boards within the 8299 family. Not all "Standards" are shown. Boards that fall outside of these options will be considered custom and will require additional engineering.



8299L



8299SCS



8299CSL



8299L-3

COMMON ACCESSORIES



C8000RH5
5 Key Shot Clock/DOG
Timer Hard-wired Remote



C8000RH20BK - 20 Key Basketball
Radio Remote and Wireless Receiver




C8000RH5 - Radio version of the 5 Key
Remote and Wireless Receiver



8290BBS (KT01810P) - Light Strip Kit
for "L" Models

Hard Wire Setup / Hardwire Override Capable



Using a Dual Capable Junction Box

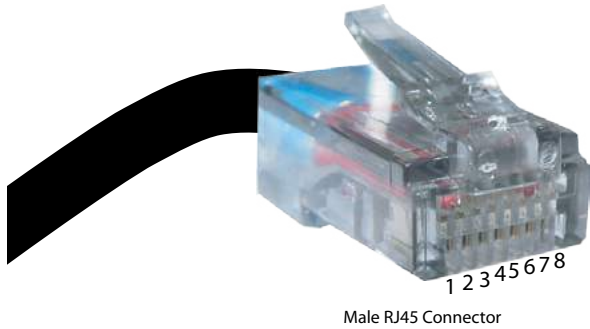


All radio scoreboards have the ability to be used via hardwire. When installed properly, the radio on the scoreboard will turn off when a console is plugged into the hardwire input (console still sends radio signal). Data travels over leads 4 & 5, while the hardwire override signal travels over 3 & 6. **A Radio board may also pass data to a hardwired board using The same wiring methods.**

The 8000 Series Console can plug directly into the scoreboard via a standard CAT5 cable and RJ45 connections. It may be necessary or convenient to use a data splitter.

Outdoor boards will require a water tight junction box. Data connections will be directly connected to the receiver board in scoreboard. Data connection and AC power cannot run in same conduit.

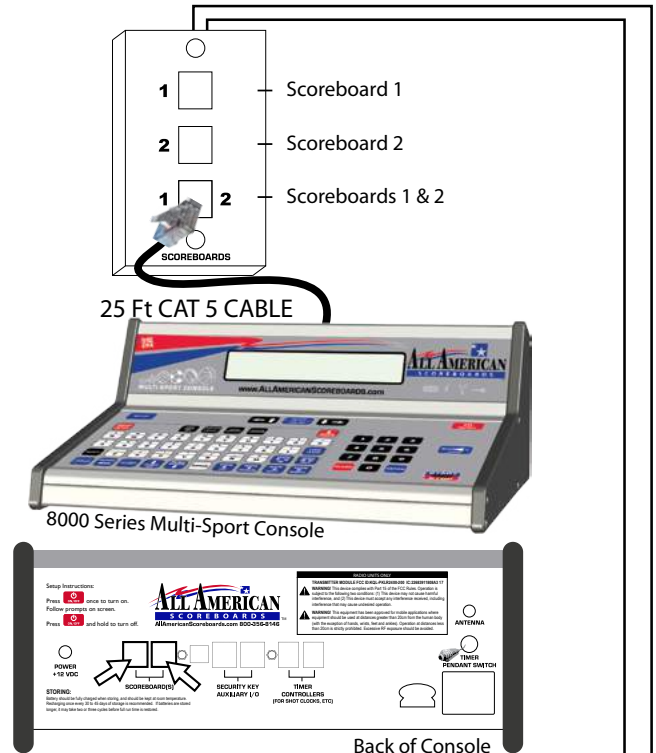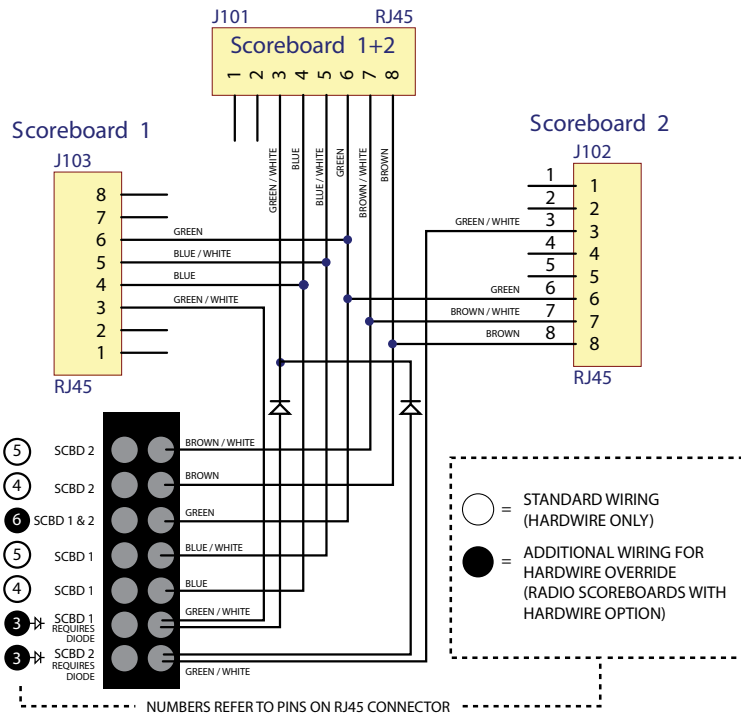

4 Conductor Twisted Data Cable (Length Specified w/ Order)

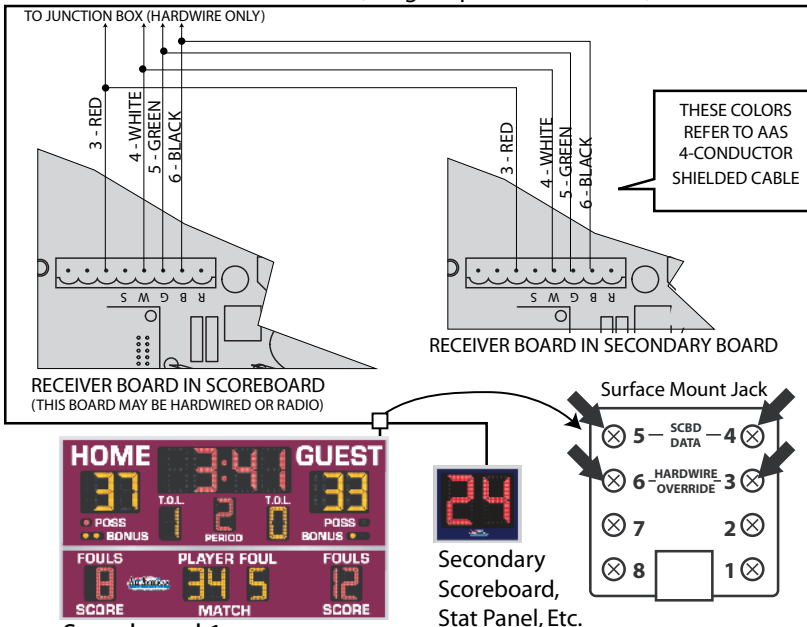

4 Conductor Twisted Data Cable (Length Specified w/ Order)

