

8322LSPC Baseball Controller Plate

Scoreboard Type: 500

Power Supply Outputs:

POWER 1 (Dual):

P1.1 ≈ 4.40A P1.2 ≈ 4.37A

POWER 2 (Quad):

P2.1 ≈ 3.87A P2.2 ≈ 3.87A

P2.3 ≈ 3.87A P2.4 ≈ 3.87A

POWER 3 (Quad):

P3.1 ≈ 3.87A P3.2 ≈ 2.92A


P3.3 ≈ 3.87A P3.4 ≈ 2.92A

POWER 4 (Quad):


P4.1 ≈ 2.38A P4.2 ≈ 2.38A

P4.3 ≈ 2.72A P4.4 ≈ 2.72A

"C" refers to controller board output. If Indicators are used, C4 data will go to the Indicator Driver Board and then to the digit(s).

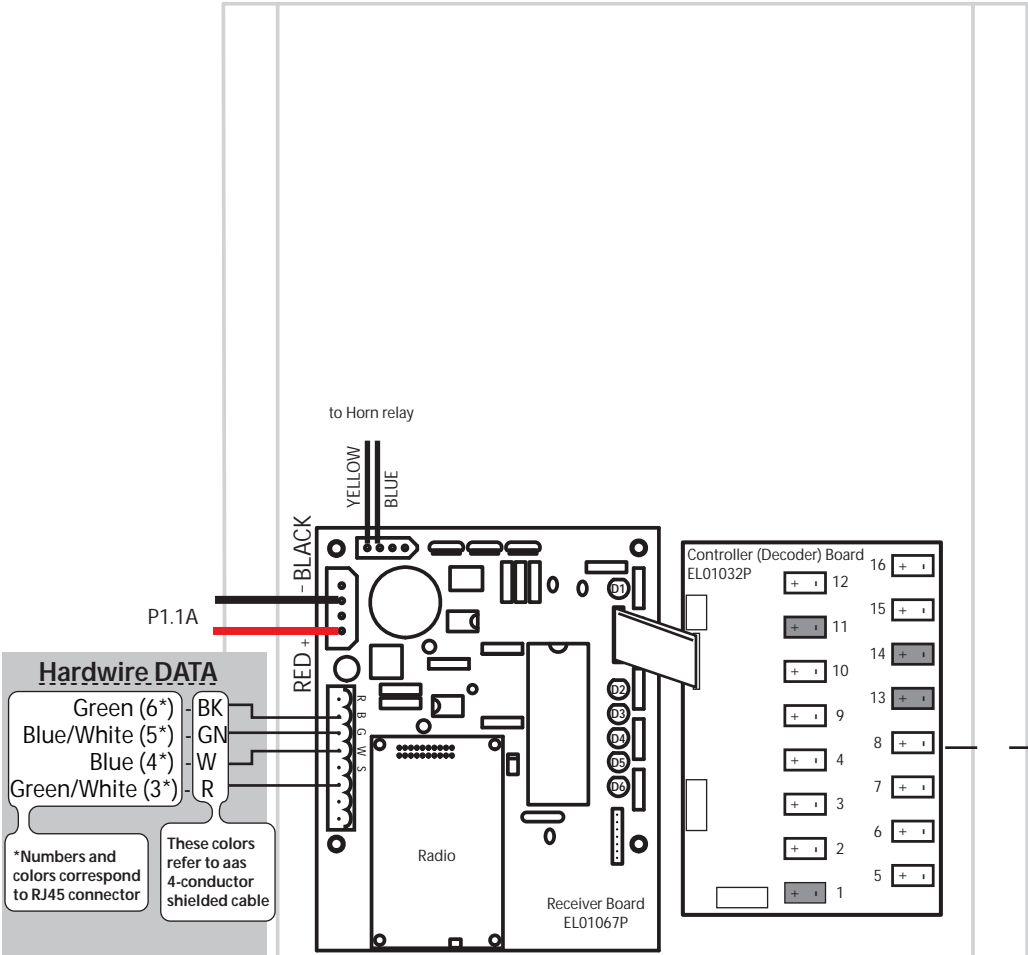

- DIGIT OUTPUTS**
2. Guest Runs, Inn 9,10
 3. Home Runs, Inn 9,10
 4. On Base Indicators
 5. Ball, Strike, Out, Hit/Error
 6. Guest Hits, Errors
 7. Guest Inn 1-4 (or 1-8)
 8. Guest Inn 5-8
 9. Home Inn 1-4 (or 1-8)
 10. Home Inn 5-8
 12. At Bat
 15. Pitcher, Guest Pitches
 16. Pitcher, Home Pitches
- NOT USED: 1, 11, 13, 14

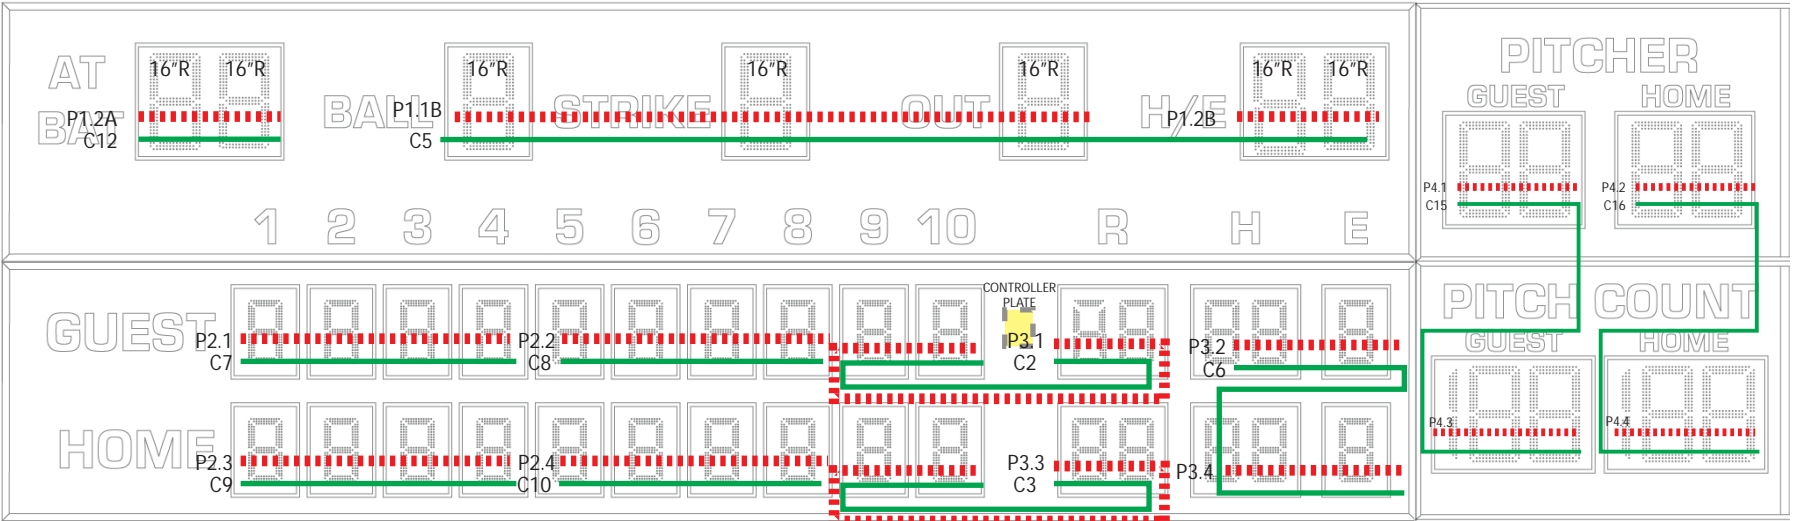

All Digits in lower panels are 12" Red. — = DATA = 10.5VDC POWER

115 VAC / 60 Hz - 11.5 Amps