

8325LSAB Baseball Controller Plate

Scoreboard Type: 500

Power Supply Outputs:

POWER 1 (Quad):

P1.1 ≈ 3.49 P1.2 ≈ 3.90A

P1.3 ≈ 2.90A P1.4 ≈ 2.90A

POWER 2 (Quad):

P2.1 ≈ 3.87A P2.2 ≈ 3.87A

P2.3 ≈ 3.87A P2.4 ≈ 3.87A

OUTPUTS

- 7. Hit
- 8. Error

NOT USED
1-6, 9, 10



OUTPUTS

- 2. Guest Runs, Inn 9
- 3. Home Runs, Inn 9
- 4. On Base Indicators
- 5. Ball, Strike, Out

- 7. Guest Inn 1-4
- 8. Guest Inn 5-8
- 9. Home Inn 1-4
- 10. Home Inn 5-8

NOT USED
1, 6, 11-16

"C" refers to controller board output. If Indicators are used, C4 data will go to the Indicator Driver Board and then to the digit(s).

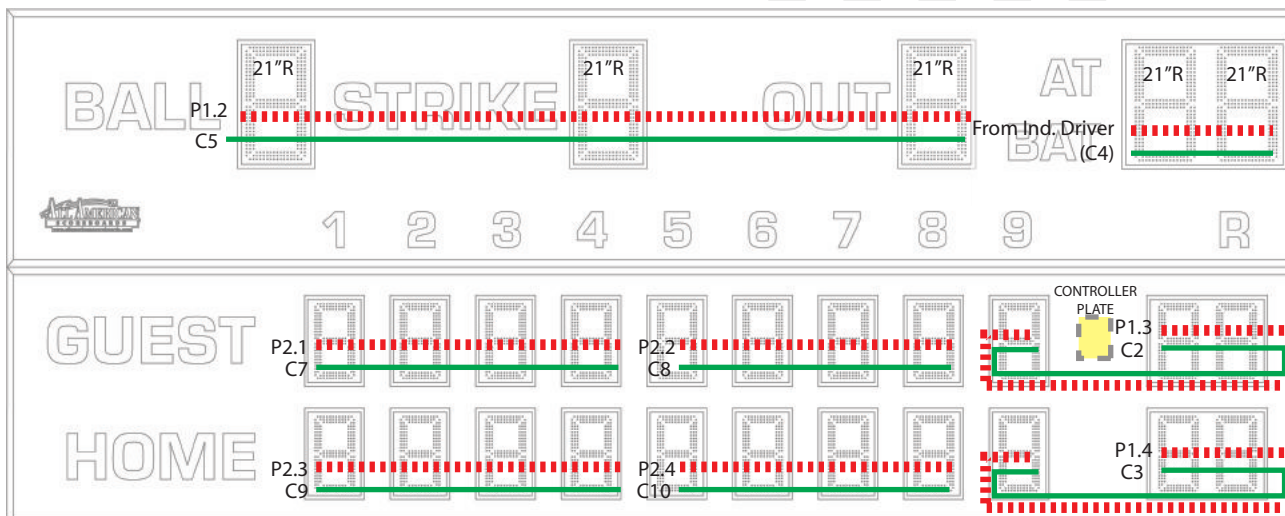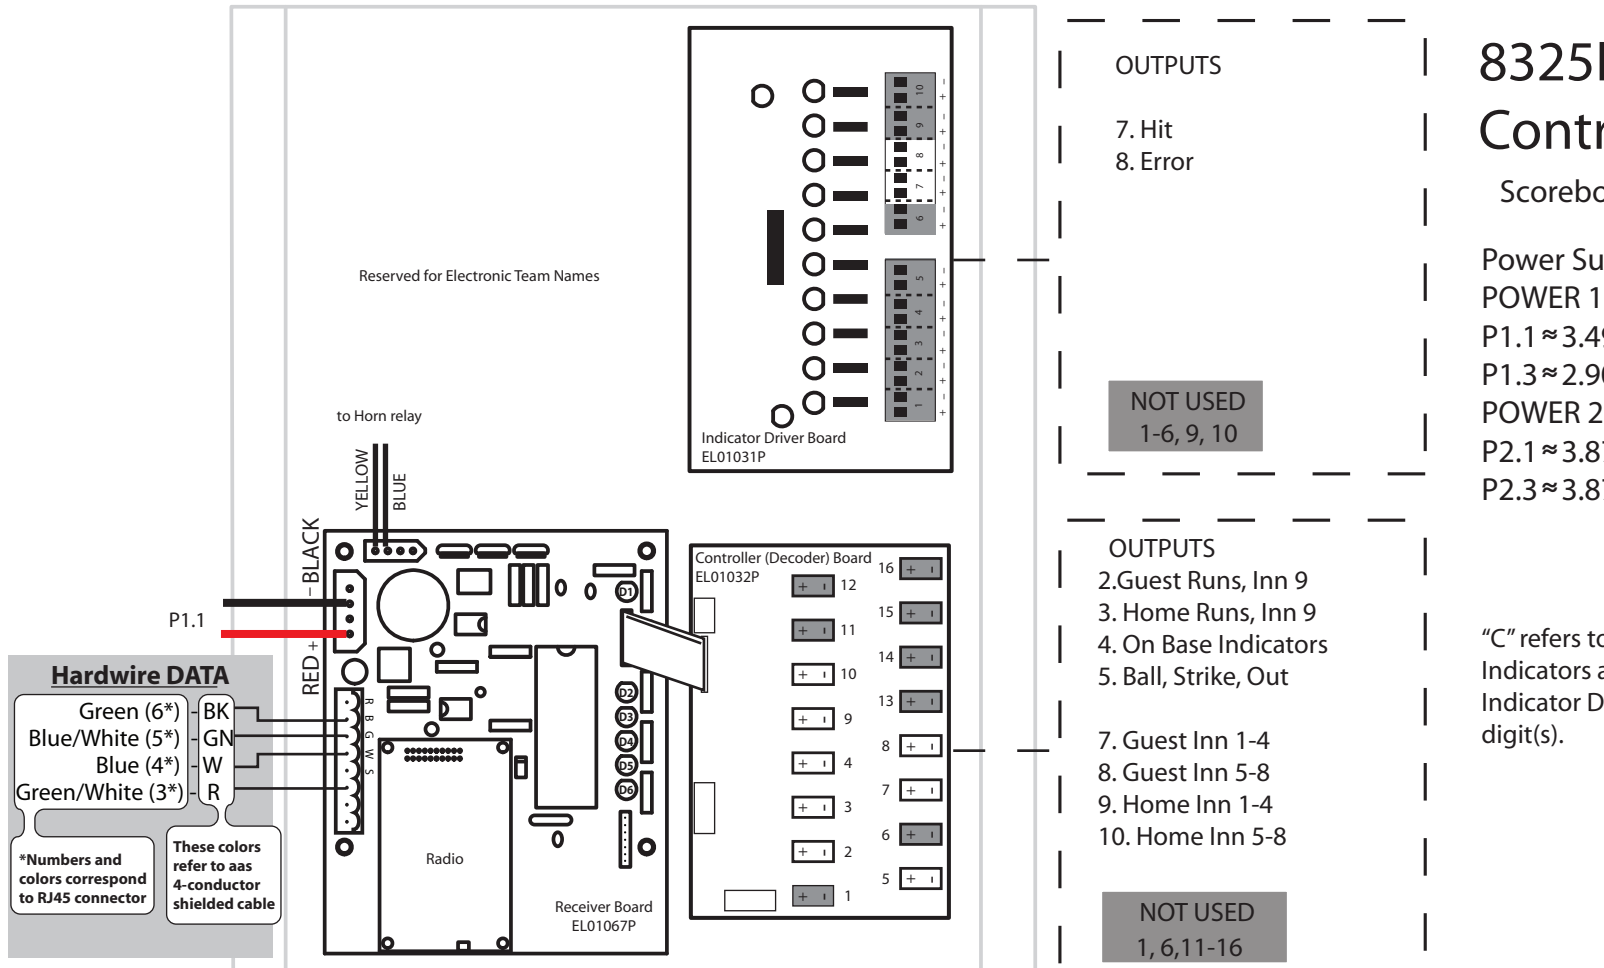

All Digits in lower panels are 14"Red. ——— = DATA = 10.5VDC POWER

115 VAC / 60 Hz - 6.0 Amps