

OUTPUTS

- 1. Home Team
- 2. Guest Team

Data: Brown (+)

NOT USED
3-16

pp409349

8335LSLTN Baseball Amber Digits
RED TEAM NAMES
Controller Plate
Scoreboard Type: 500

- Power Supply Outputs:
- POWER 1 (Quad):
P1.1 ≈ 4.03A P1.2 ≈ 2.75A
P1.3 ≈ 2.13A
- POWER 2 (Quad):
P2.1 ≈ 3.62A P2.2 ≈ 3.62A
P2.3 ≈ 3.62A P2.4 ≈ 3.62A
- POWER 3 (Quad):
P3.1 ≈ 2.41A P3.2 ≈ 3.62A
P3.3 ≈ 2.41A P3.4 ≈ 3.62A
- POWER 4 (Quad):
P4.1 ≈ 2.42A P4.2 ≈ 2.42A
P4.3 ≈ 2.42A P4.4 ≈ 2.4A
- POWER 5 (DUAL): RED TEAM NAMES
P5.1 ≈ 3.75A P5.2 ≈ 3.75A

OUTPUTS

- 7. Hit
- 8. Error


NOT USED
1,4,6,9,10

OUTPUTS

- 2. Guest Runs, Inn 9,10
- 3. Home Runs, Inn 9,10
- 4. Indicators, Batter
- 5. Ball, Strike, Out
- 6. Guest Hits, Errors
Home Hits Errors
- 7. Guest Inn 1-4
- 8. Guest Inn 5-8
- 9. Home Inn 1-4
- 10. Home Inn 5-8

NOT USED
1,11-16

"C" refers to controller board output. If Indicators are used, C4 data will go to the Indicator Driver Board and then to the digit(s).

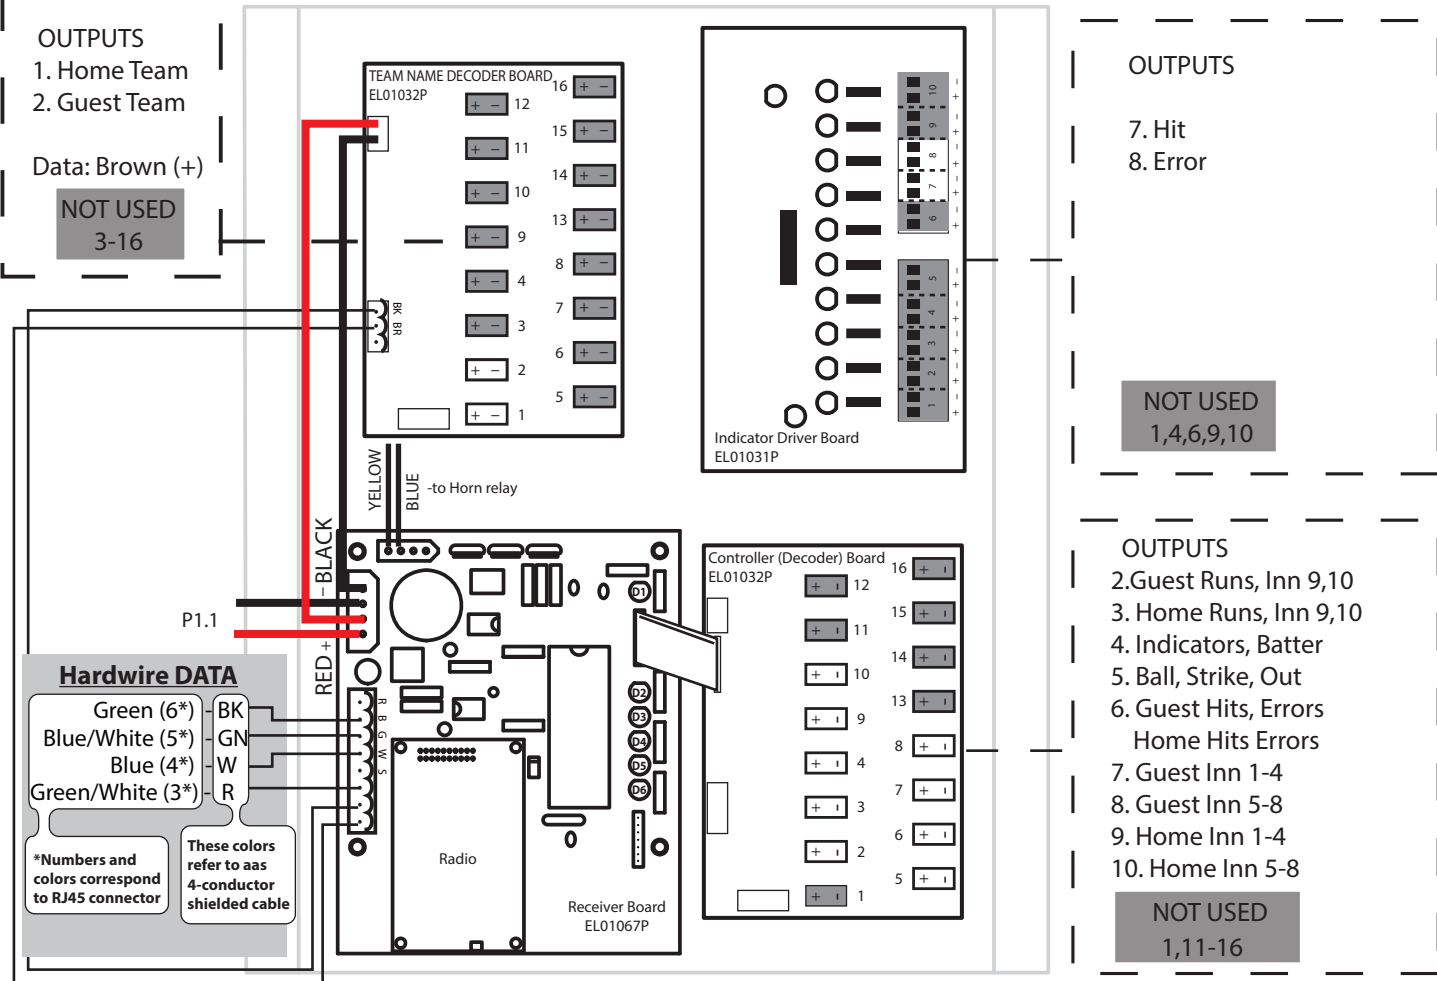


Hardwire DATA

- Green (6*) BK
- Blue/White (5*) GN
- Blue (4*) W
- Green/White (3*) R

*Numbers and colors correspond to RJ45 connector

These colors refer to aas 4-conductor shielded cable

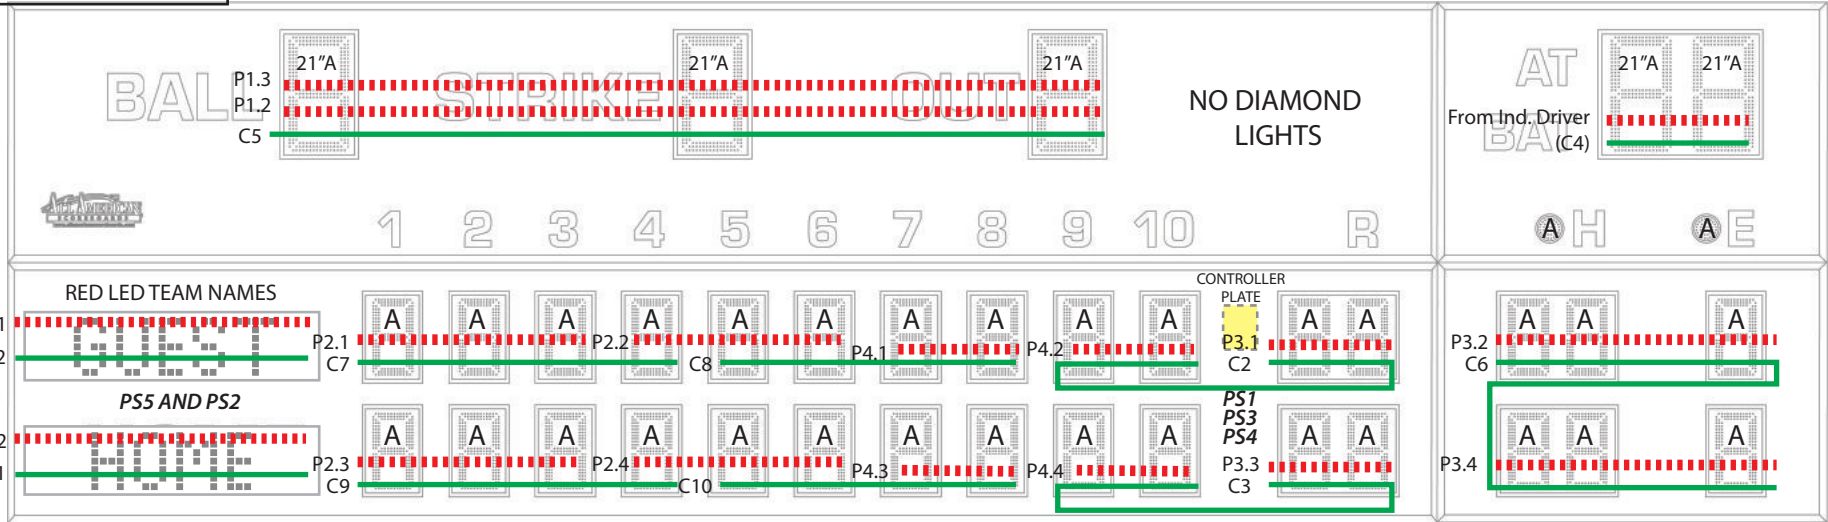

All Digits in lower panels are 14"AMBER ——— = DATA - - - - - = 10.5VDC POWER

115 VAC / 60 Hz - 14.5 Amps