
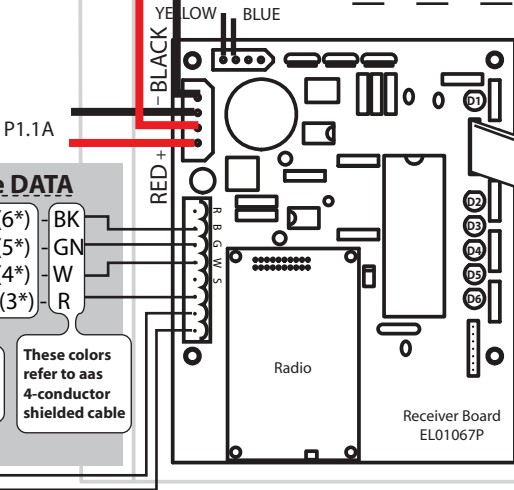
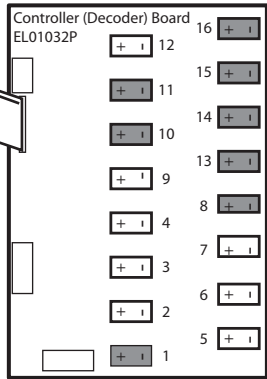
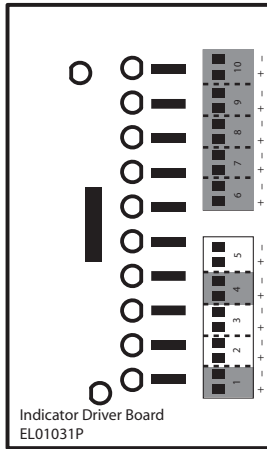


CAPTIONS OUTPUTS

1. Home Team
2. Guest Team
3. At Bat
4. Ball
5. Strike
6. Out
7. H/E

NOT USED
8-16

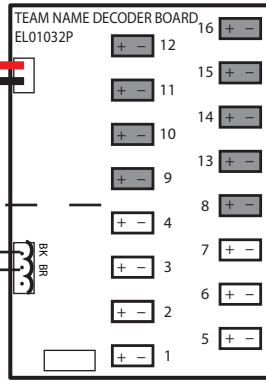

Hardwire DATA

- Green (6*) BK
- Blue/White (5*) GN
- Blue (4*) W
- Green/White (3*) R

*Numbers and colors correspond to RJ45 connector

These colors refer to aas 4-conductor shielded cable

INDICATOR OUTPUTS

- 2.3rd Base
- 3.1st Base
- 5.2nd Base

NOT USED
1,4,6-10

TEAM NAMES

- 1.HOME
- 2.GUEST

NOT USED
3-16

DIGIT OUTPUTS

- 2.Guest Runs, Inn 9,10
- 3.Home Runs, Inn 9,10
4. On Base Indicators
5. Ball, Strike, Out, Hit/Error
6. Guest Hits, Errors
Home Hits Errors
7. Guest Inn 1-8
9. Home Inn 1-8
- 12.At Bat


NOT USED: 1,8,10,11,13-16

8339XLSTNC Baseball Controller Plate

Scoreboard Type: 500

- Power Supply Outputs:
- POWER 1 (Quad):
P1.1 ≈ .75A P1.2 ≈ 4.5A
P1.3 ≈ 4.2A P1.4 ≈ 4.2A
- POWER 2 (Quad):
P2.1 ≈ 4.2A P2.2 ≈ 4.2A
P2.3 ≈ 4.2A P2.4 ≈ 4.2A
- POWER 3 (Quad):
P3.1 ≈ 4.2A P3.2 ≈ 4.2A
P3.3 ≈ 4.4A P3.4 ≈ 4.4A
- POWER 4 (Quad):
P4.1 ≈ 2.8A P4.2 ≈ 3.99A
P4.3 ≈ 3.99A P4.4 ≈ 2.8A
- POWER 5 (Quad):
P5.1 ≈ 2.8A P5.2 ≈ 2.8A
P5.3 ≈ 3.99A P5.4 ≈ 3.99A

"C" refers to controller board output. If Indicators are used, C4 data will go to the Indicator Driver Board and then to the digit(s).

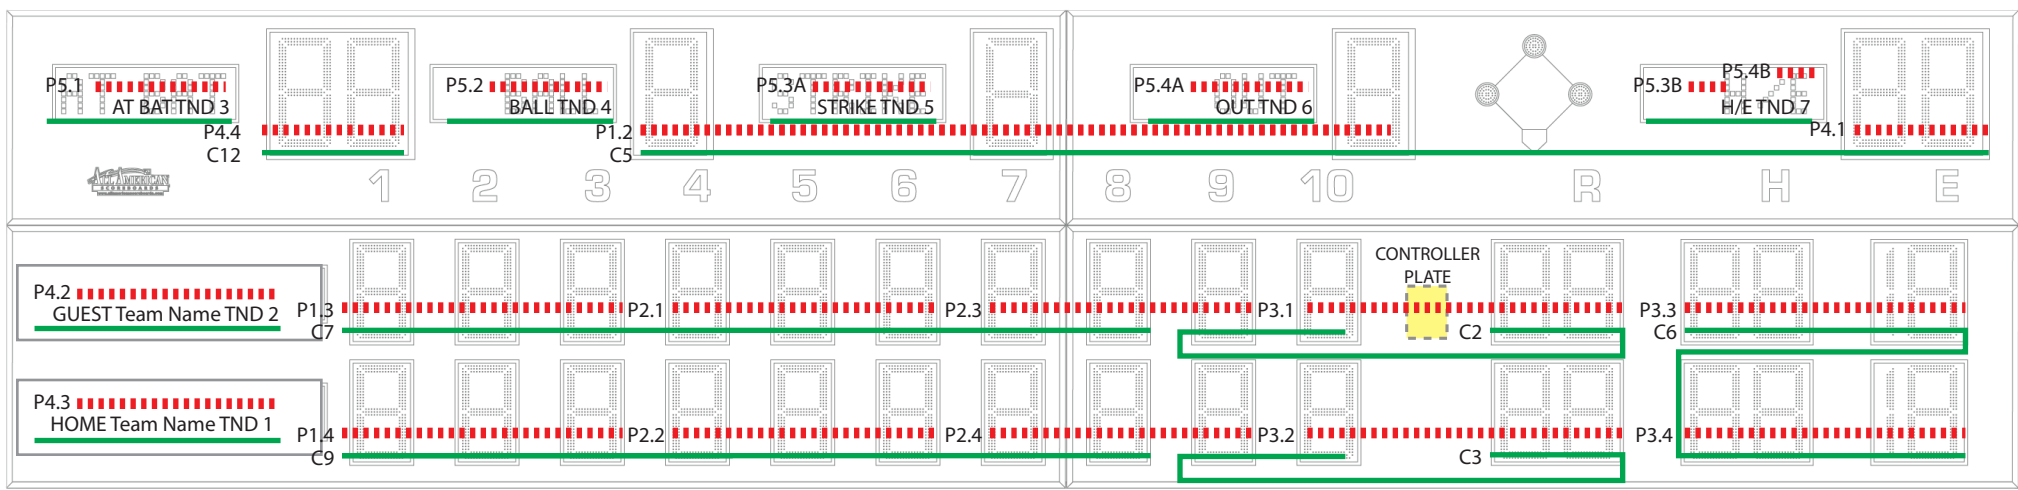

All lower digits are 21", Top is 24". ALL LED CAPTIONS ARE AMBER.

— = DATA - - - - - = 10.5VDC POWER

115 VAC / 60 Hz - 15 Amps