


## 8782XTN Soccer Controller Plate

Scoreboard Type: 400  
 Requires SB Firmware RX8V211+  
 Requires Console 6.17A+

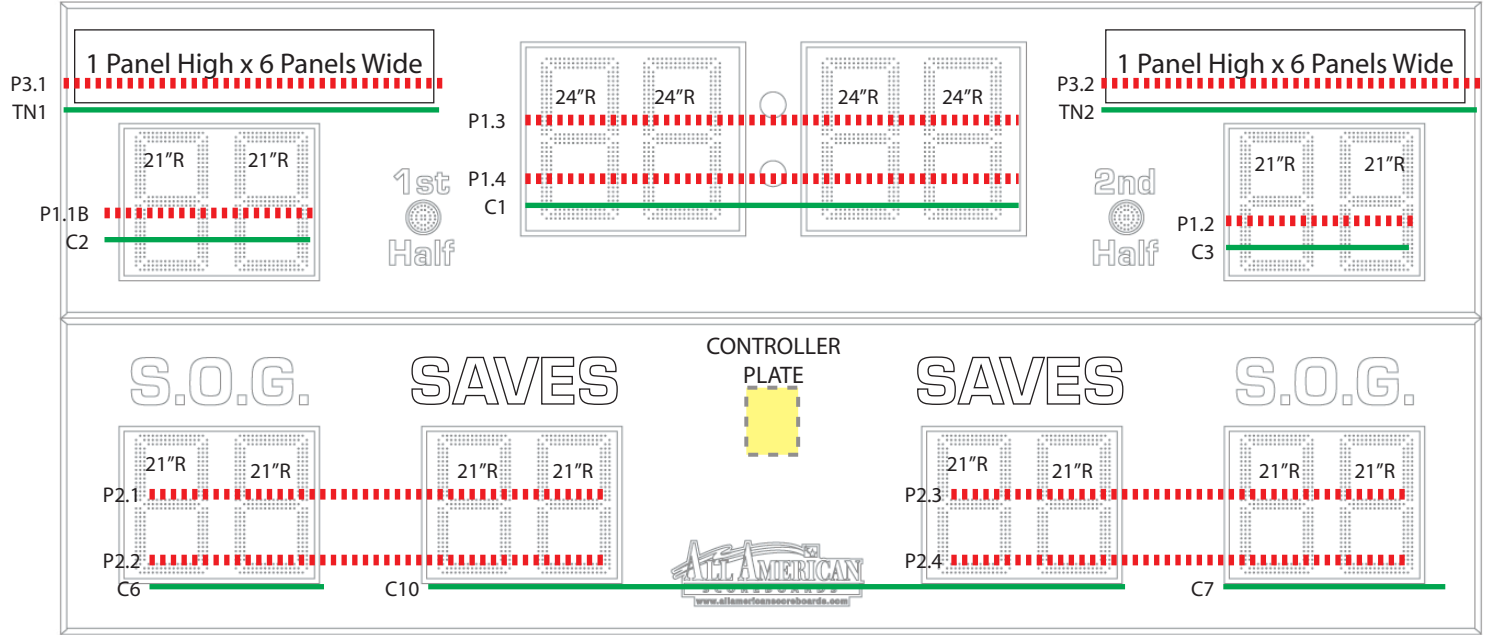

Power Supply Outputs (Full Brightness & Full Digits): P1.1 ≈ 3.26A P1.2 ≈ 2.60A P1.3 ≈ 2.83A P1.4 ≈ 2.83A  
 P2.1 ≈ 2.60A P2.2 ≈ 2.60A P2.3 ≈ 2.60A P2.4 ≈ 2.60A  
 P3.1 ≈ 4.0A P3.2 ≈ 4.0A

"C" refers to controller board output. If Indicators are used, C4 data will go to the Indicator Driver Board and then to the digit(s).

— = DATA    - - - - - = 10.5VDC POWER    115 VAC / 60 Hz - 8.5 Amps