8322LSTN Baseball Controller Plate

PP429338B White team names behind blue diffuser

Scoreboard Type: 500

Power Supply Outputs:
POWER 1 (10.5 VDC Dual):
P1.1≈4.40A P1.2≈4.37A
POWER 2 (10.5 VDC Quad):
P2.1≈3.87A P2.2≈3.87A
P2.3≈3.87A P2.4≈3.87A
POWER 3 (10.5 VDC Quad):
P3.1≈3.87A P3.2≈2.92A
P3.3≈3.87A P3.4≈2.92A
POWER 4 (14.5VDC Quad):
P4.1≈2.4A (3 Panels) P4.2≈1.6A (2 Panels)
P4.3≈2.4A (3 Panels) P4.4≈1.6A (2 Panels)

"C" refers to controller board output. If Indicators are used, C4 data will go to the Indicator Driver Board and then to the digit(s).

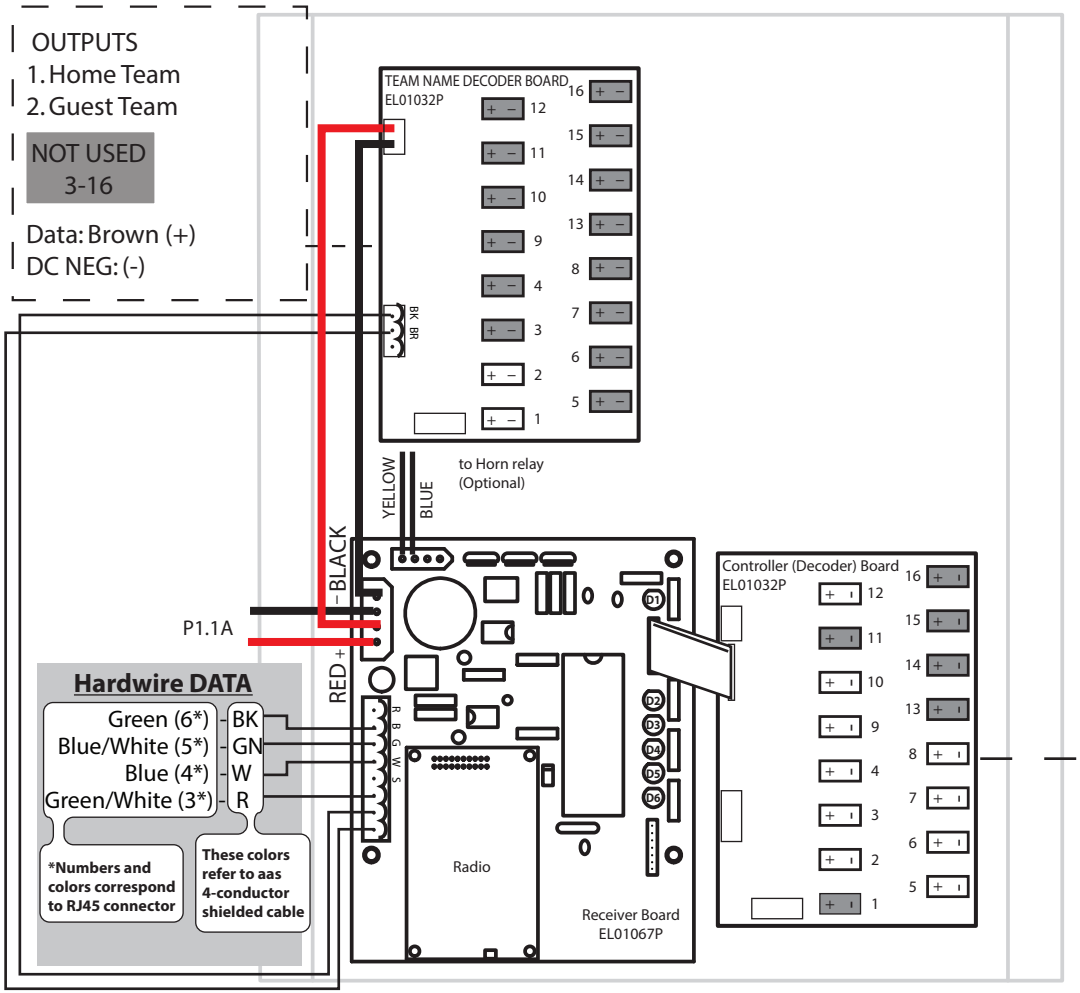

DIGIT OUTPUTS

2.Guest Runs, Inn 9,10
3. Home Runs, Inn 9,10
4. On Base Indicators
5. Ball, Strike, Out, Hit/Error
6. Guest Hits, Errors
   Home Hits Errors
7. Guest Inn 1-4(or 1-8)
8. Guest Inn 5-8
9. Home Inn 1-4 (or 1-8)
10. Home Inn 5-8
12.At Bat

NOT USED: 1,11,13-16

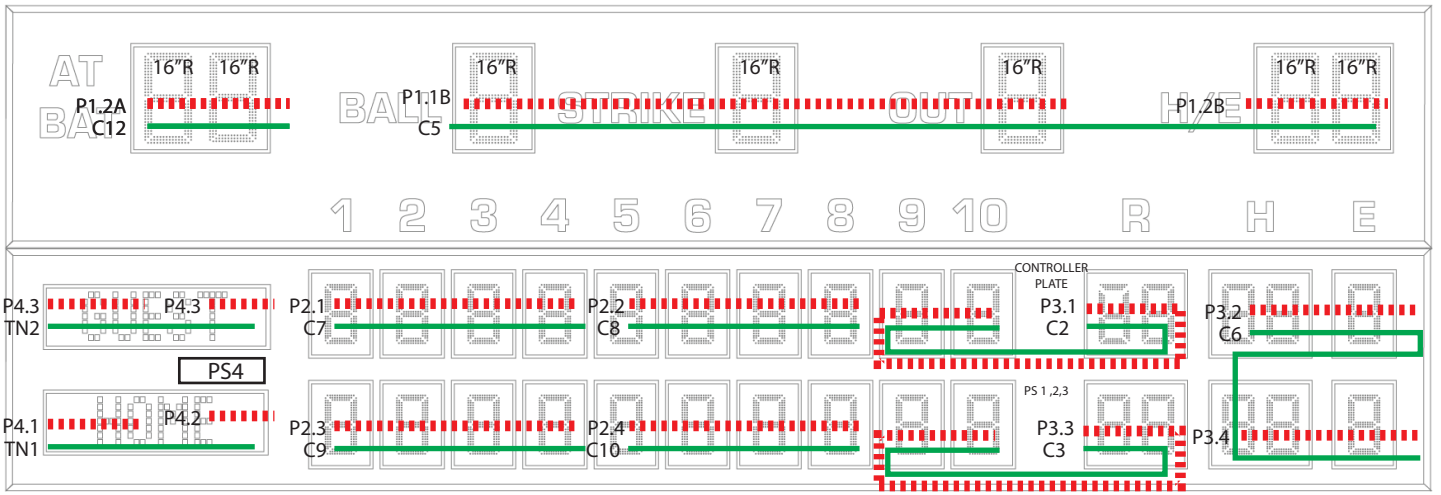

All Digits in lower panels are 12"Red.

= DATA = 10.5VDC POWER

115 VAC / 60 Hz - 11.5 Amps

rev. 7/1/2020