8322LSIPC Baseball (AMBER DIGITS) Controller Plate

Scoreboard Type: 500

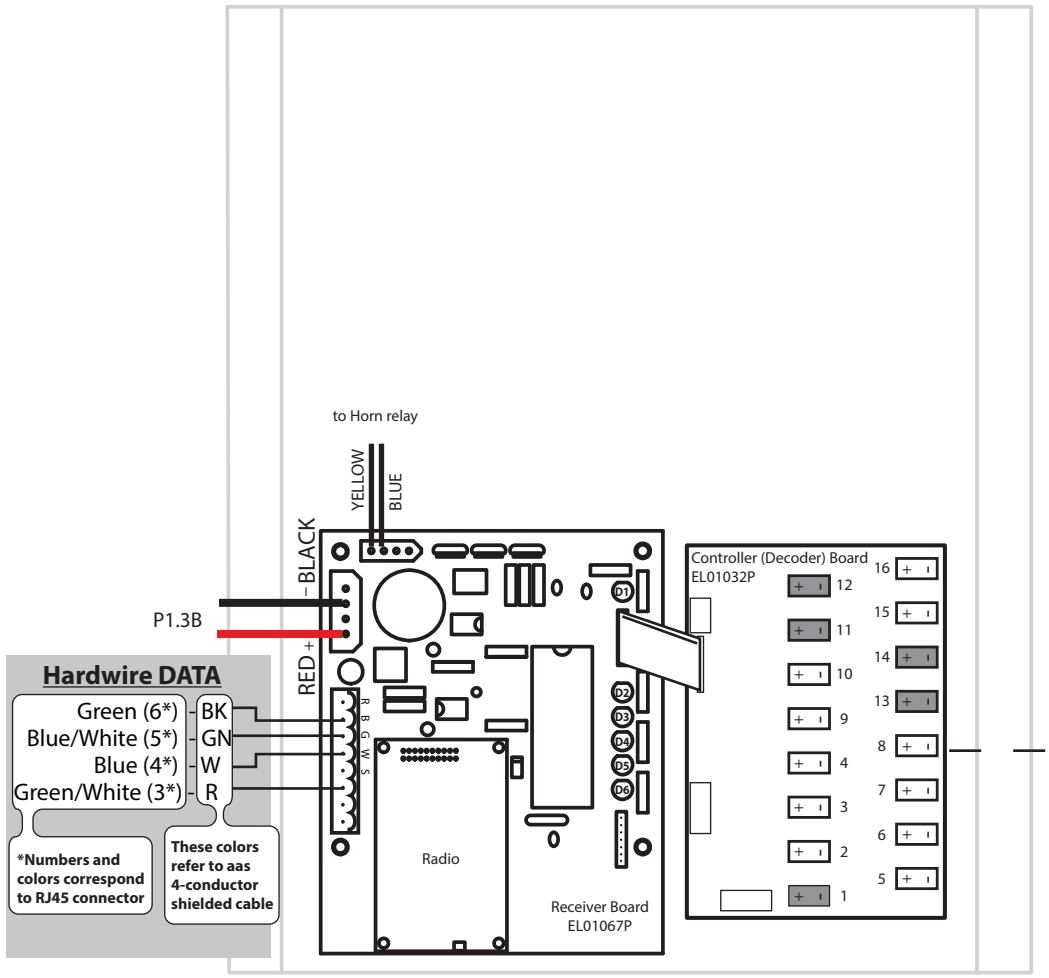

DIGIT OUTPUTS

2.Guest Runs, Inn 9,10
3. Home Runs, Inn 9,10
4. On Base Indicators
5. Ball, Strike, Out
6. Guest Hits, Errors
   Home Hits Errors
7. Guest Inn 1-4(or 1-8)
8. Guest Inn 5-8
9. Home Inn 1-4 (or 1-8)
10. Home Inn 5-8
15. Pitch Count Guest
16. Pitch Count Home

NOT USED: 1,11-14

Power Supply Outputs:
POWER 1 (QUAD):
P1.1≈4.05A P1.2≈2.72A
P1.3≈3.84A P1.4≈3.63A
POWER 2 (Quad):
P2.1≈3.62A P2.2≈3.62A
P2.3≈3.62A P2.4≈3.62A
POWER 3 (Quad):
P3.1≈3.62A P3.2≈3.62A
P3.3≈3.62A P3.4≈3.62A
POWER 4 (Single):
P4.1≈3.62A

"C" refers to controller board output. If Indicators are used, C4 data will go to the Indicator Driver Board and then to the digit(s).

All Digits in lower panels are 12" AMBER. ——— = DATA ▪▪▪▪▪▪▪ = 10.5VDC POWER

115 VAC / 60 Hz - 10.5 Amps

rev. 1/2/2020