# 8322LSTN-AW Baseball Controller Plate

Scoreboard Type: 500

**Power Supply Outputs:**
**POWER 1 (10.5 VDC Dual):**
P1.1≈4.40A P1.2≈4.37A
**POWER 2 (10.5 VDC Quad):**
P2.1≈3.87A P2.2≈3.87A
P2.3≈3.87A P2.4≈3.87A
**POWER 3 (10.5 VDC Quad):**
P3.1≈3.87A P3.2≈2.92A
P3.3≈3.87A P3.4≈2.92A
**POWER 4 (14.5VDC Quad):**
P4.1≈2.4A (3 Panels) P4.2≈1.6A (2 Panels)
P4.3≈2.4A (3 Panels) P4.4≈1.6A (2 Panels)

"C" refers to controller board output. If Indicators are used, C4 data will go to the Indicator Driver Board and then to the digit(s).

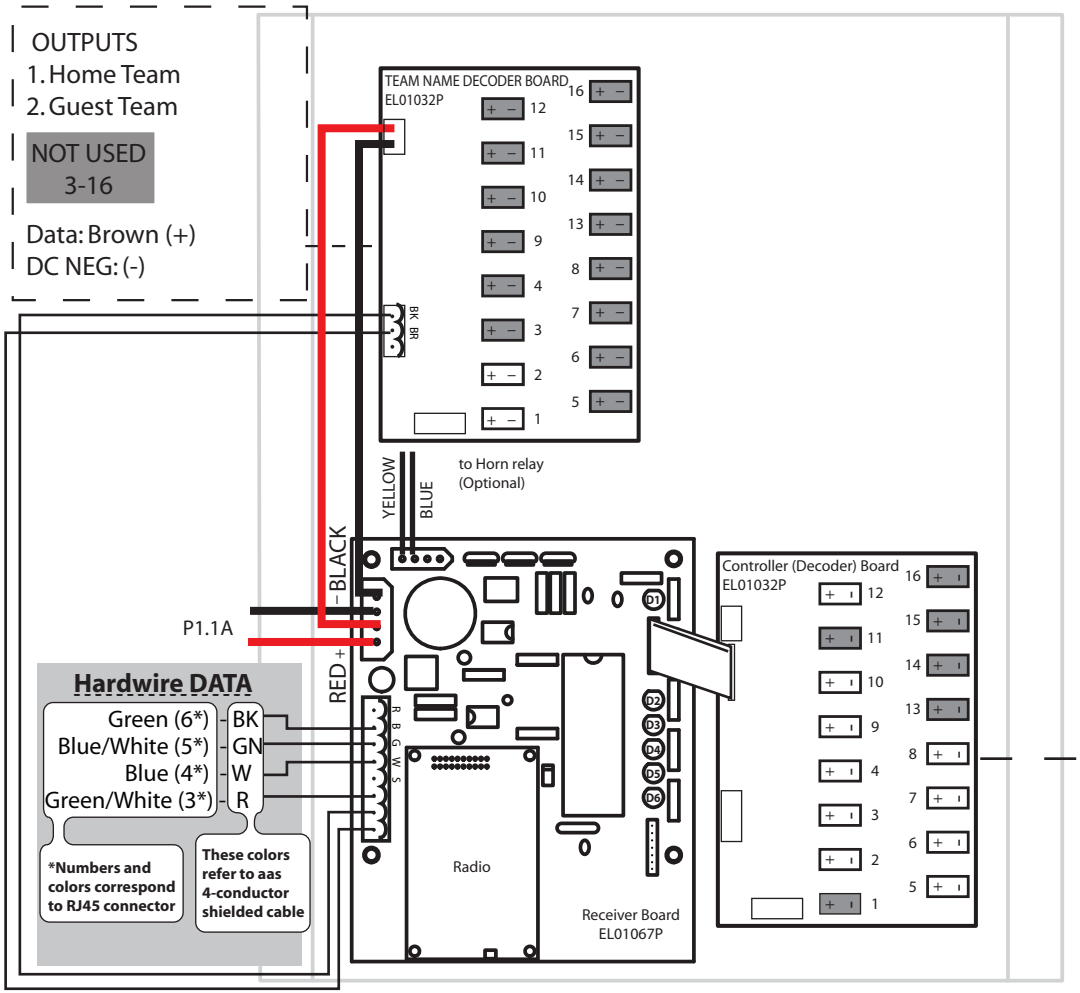


**DIGIT OUTPUTS**
2. Guest Runs, Inn 9,10
3. Home Runs, Inn 9,10
4. On Base Indicators
5. Ball, Strike, Out, Hit/Error
6. Guest Hits, Errors
   Home Hits Errors
7. Guest Inn 1-4(or 1-8)
8. Guest Inn 5-8
9. Home Inn 1-4 (or 1-8)
10. Home Inn 5-8
12. At Bat

NOT USED: 1,11,13-16

All Digits in lower panels are 12"Amber. = DATA = 10.5VDC POWER = 14.5VDC POWER

115 VAC / 60 Hz - 11.5 Amps

rev. 9.2.14