8327LSTN Baseball
Red Team Names, Amber Digits, No Diamond Lights
PP424203A
Controller Plate Diagram

Scoreboard Type: 500

Power Supply Outputs:
POWER 1 (Quad):
P1.1 ≈ 2.69A P1.2 ≈ 2.44A
P1.3 ≈ 2.42A P1.4 ≈ 2.42A
POWER 2 (Quad):
P2.1 ≈ 3.63A P2.2 ≈ 3.63A
P2.3 ≈ 3.63A P2.4 ≈ 3.63A
POWER 3 (Quad):
P3.1 ≈ 2.42A P3.2 ≈ 2.42A
P3.3 ≈ 2.42A P3.4 ≈ 2.42A
POWER 4 (Dual):
P4.1 ≈ 3.3A P4.2 ≈ 3.3A

"C" refers to controller board output. If Indicators are used, C4 data will go to the Indicator Driver Board and then to the digit(s).

OUTPUTS
1. Home Team
2. Guest Team

Data: Brown (+)

NOT USED
3-16

TEAM NAME DECODER BOARD
EL01032P

to Horn relay

YELLOW
BLUE
BLACK
RED +
P1.1A

Controller (Decoder) Board
EL01032P

Radio

Receiver Board
EL01067P

OUTPUTS
2.Guest Runs, Inn 9-10
3. Home Runs, Inn 9-10
4. On Base Indicators
5. Ball, Strike, Out

7. Guest Inn 1-4
8. Guest Inn 5-8
9. Home Inn 1-4
10. Home Inn 5-8

NOT USED
1, 6,11-16

Hardwire DATA

Green (6*)	BK
Blue/White (5*)	GN
Blue (4*)	W
Green/White (3*)	R

*Numbers and colors correspond to RJ45 connector

These colors refer to aas 4-conductor shielded cable

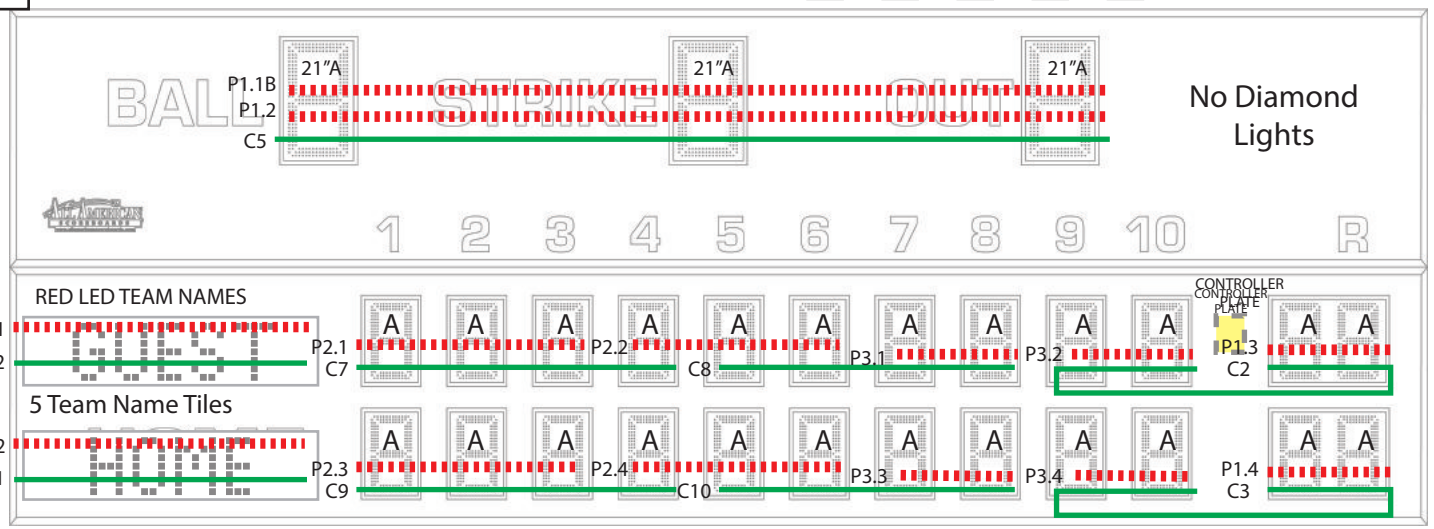

All Digits in lower panels are 14" Amber. = DATA = 10.5VDC POWER

115 VAC / 60 Hz - 11.5 Amps

rev. 2.07.2020