8336LSTN Baseball Controller Plate

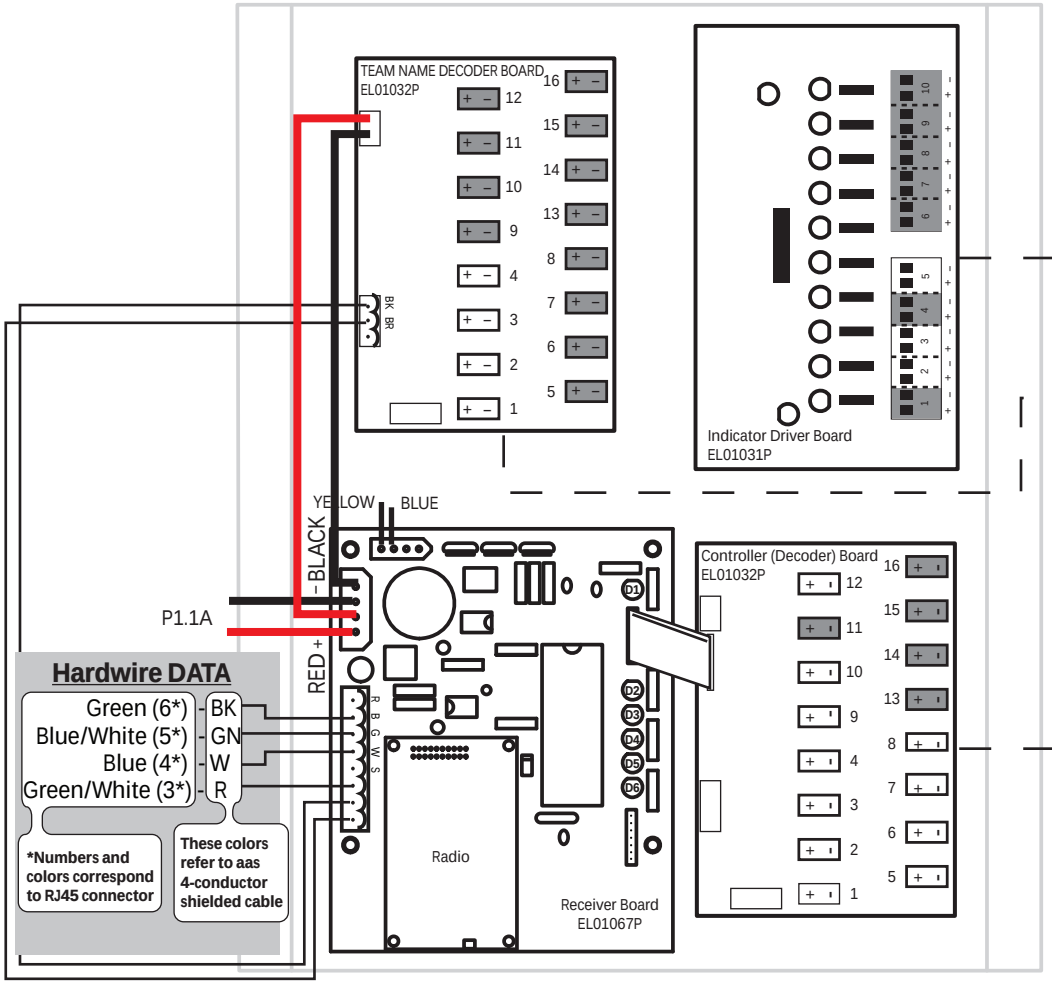

INDICATOR OUTPUTS
2. 3rd Base
3. 1st Base
5. 2nd Base

NOT USED 1,4,6-10

TEAM NAMES
1. HOME Top
2. HOME Bottom
3. GUEST Top
4. GUEST Bottom

NOT USED 5-16

DIGIT OUTPUTS
2. Timer
2. Guest Runs, Inn 9,10
3. Home Runs, Inn 9,10
4. On Base Indicators
5. Ball, Strike, Out, Hit/Error
6. Guest Hits, Errors
   Home Hits Errors
7. Guest Inn 1-8
9. Home Inn 1-8
12. At Bat

NOT USED: 11,13-16

Scoreboard Type: 500

Power Supply Outputs:
POWER 1 (Quad):
P1.1≈3.45A P1.2≈4.2A
P1.3≈3.57A P1.4≈4.2A
POWER 2 (Quad):
P2.1≈3.57A P2.2 ≈3.57A
P2.3≈3.57A P2.4 ≈3.57A
POWER 3 (Quad):
P3.1≈3.57A P3.2≈3.57A
P3.3≈3.57A P3.4≈3.57A
POWER 4 (Quad):
P4.1≈4.2A P4.2≈4.2A
P4.3≈4.2A P4.4≈4.2A
POWER 5 (Dual):
P4.1≈2.95A P4.2≈2.95A

"C" refers to controller board output. If Indicators are used, C4 data will go to the Indicator Driver Board and then to the digit(s).

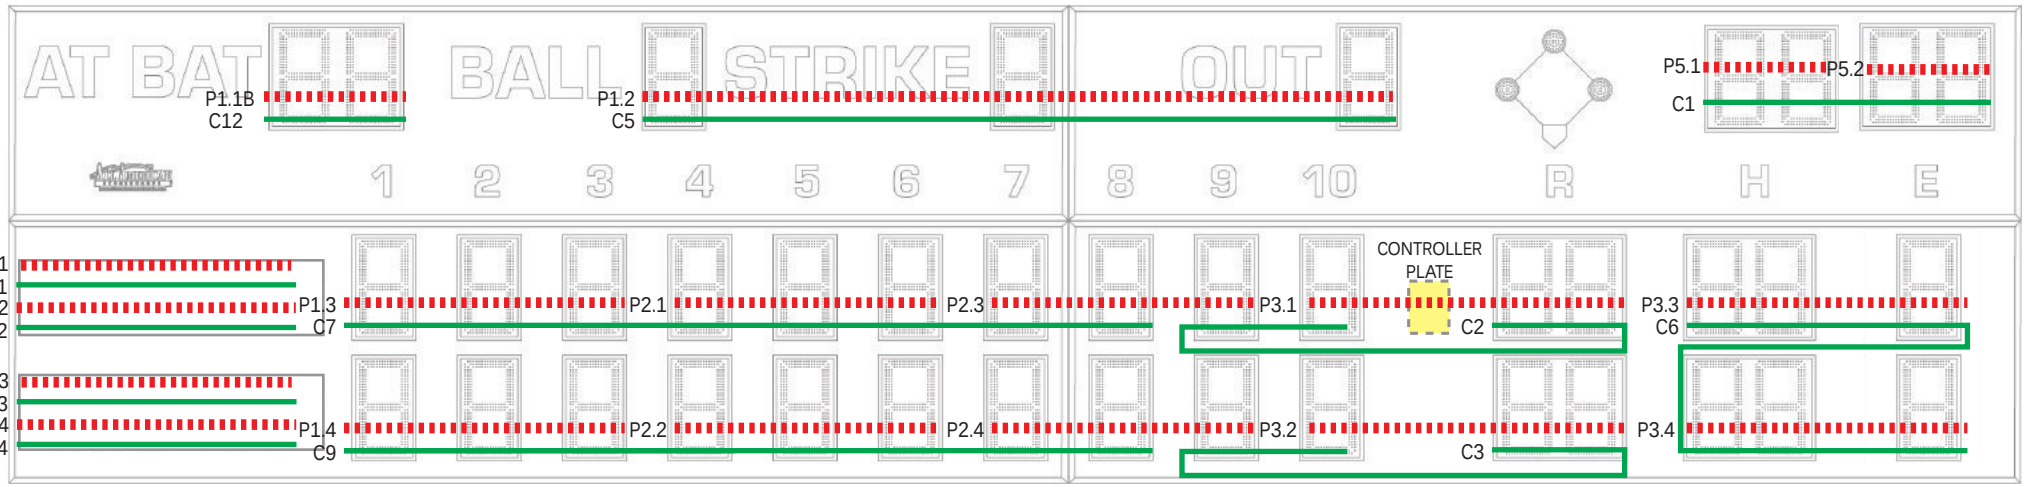

All lower digits are 18" Red. Top is 24" Red.
6" Panels: 2 Panels by 10 Panels for Team Names

= DATA = 10.5VDC POWER

115 VAC / 60 Hz - 14.5 Amps

rev. 4.18.18