8339LSTN Baseball Controller Plate

ORIGINAL TEAM NAME CONFIGURATION - Pre 7/8/2010

Scoreboard Type: 500

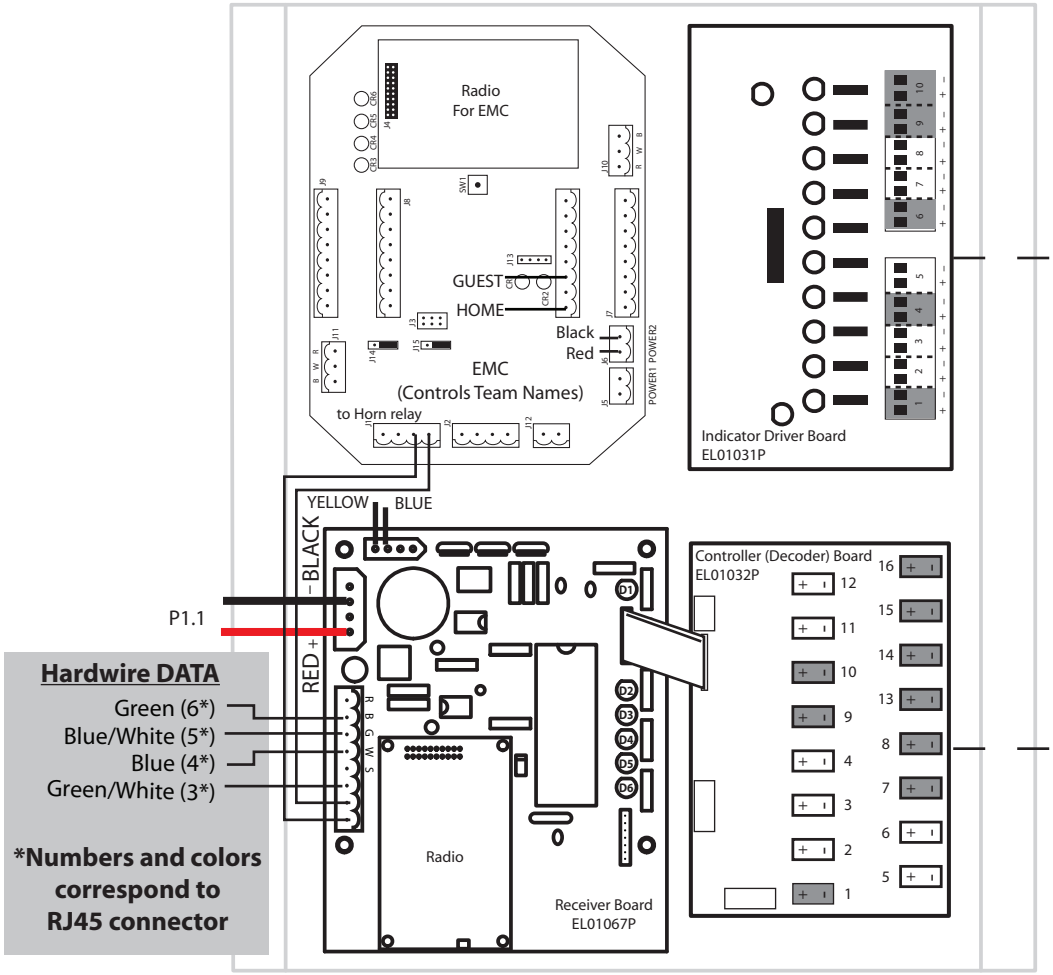

Hardwire DATA

Green (6*)
Blue/White (5*)
Blue (4*)
Green/White (3*)

***Numbers and colors correspond to RJ45 connector**

OUTPUTS

2. 3rd Base
3. 1st Base
5. 2nd Base

NOT USED
1,4,6-10

OUTPUTS

2. Guest Runs, Inn 9,10
3. Home Runs, Inn 9,10
4. Indicators, Batter
5. Ball, Strike, Out, Hit/Error
6. Guest Hits, Errors
   Home Hits Errors
11. Guest Inn 1-8
12. Home Inn 1-8

NOT USED
1,11-16

Power Supply Outputs:

POWER 1 (Quad):
P1.1 ≈ 3.38A P1.2 ≈ 3.99A
P1.3 ≈ 3.99A P1.4 ≈ 3.99A

POWER 2 (Quad):
P2.1 ≈ 3.99A P2.2 ≈ 3.99A
P2.3 ≈ 3.99A P2.4 ≈ 3.99A

POWER 3 (Quad):
P3.1 ≈ 3.99A P3.2 ≈ 3.99A
P3.3 ≈ 4.37A P3.4 ≈ 4.37A

POWER 4 (Single):
P4.1 ≈ 2.66A

"C" refers to controller board output. If Indicators are used, C4 data will go to the Indicator Driver Board and then to the digit(s).

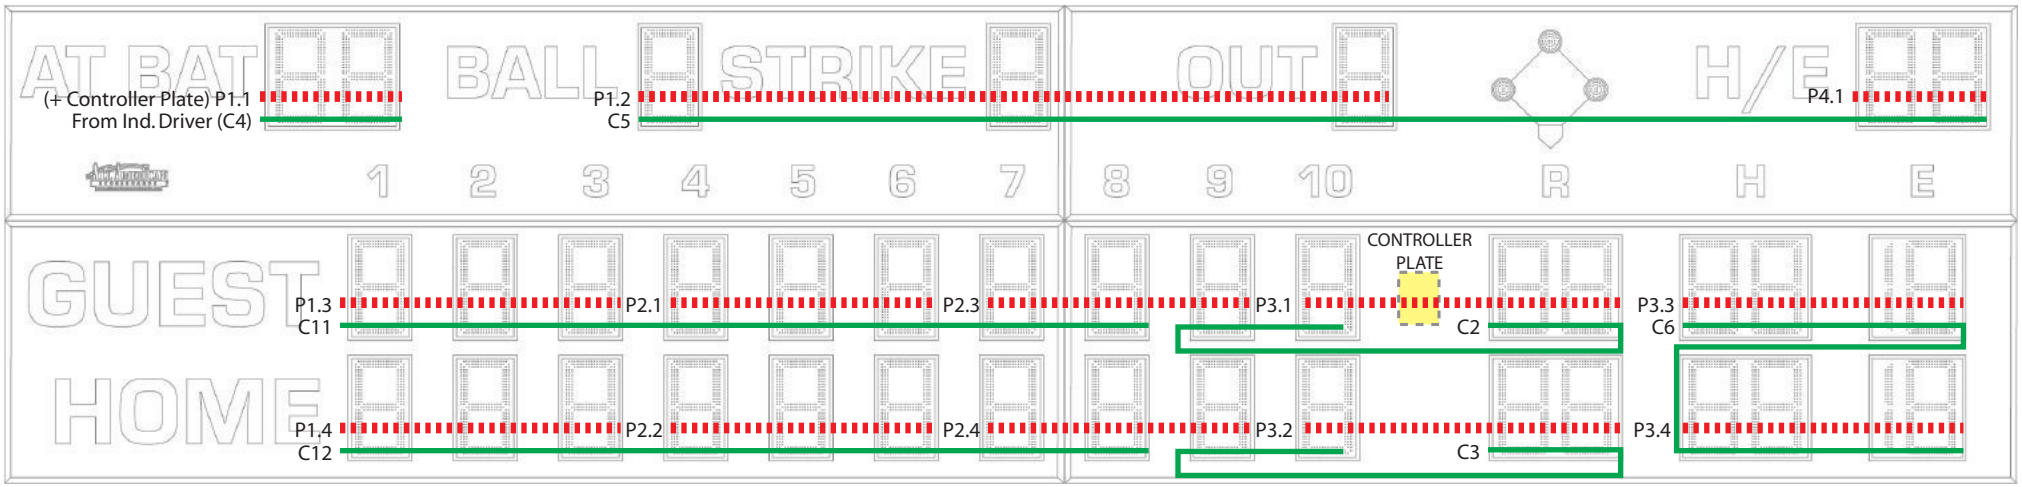

All digits are 21"Red. = DATA = 10.5VDC POWER

115 VAC / 60 Hz - 10.4 Amps

rev. 11.15.10