

8339LS Baseball Controller Plate

Scoreboard Type: 500

Power Supply Outputs:

POWER 1 (Quad):

P1.1 ≈ 0.72A P1.2 ≈ 3.99A

P1.3 ≈ 3.99A P1.4 ≈ 3.99A

POWER 2 (Quad):

P2.1 ≈ 3.99A P2.2 ≈ 3.99A

P2.3 ≈ 3.99A P2.4 ≈ 3.99A

POWER 3 (Quad):

P3.1 ≈ 3.99A P3.2 ≈ 3.99A

P3.3 ≈ 4.37A P3.4 ≈ 4.37A

POWER 4 (Dual):

P4.1 ≈ 2.66A P4.2 ≈ 2.66A

"C" refers to controller board output. If Indicators are used, C4 data will go to the Indicator Driver Board and then to the digit(s).



INDICATOR OUTPUTS

- 2. 3rd Base
- 3. 1st Base
- 5. 2nd Base

NOT USED
1,4,6-10

DIGIT OUTPUTS

- 2. Guest Runs, Inn 9,10
- 3. Home Runs, Inn 9,10
- 4. On Base Indicators
- 5. Ball, Strike, Out, Hit/Error
- 6. Guest Hits, Errors
- Home Hits Errors
- 7. Guest Inn 1-4 (or 1-8)
- 8. Guest Inn 5-8
- 9. Home Inn 1-4 (or 1-8)
- 10. Home Inn 5-8
- 12. At Bat

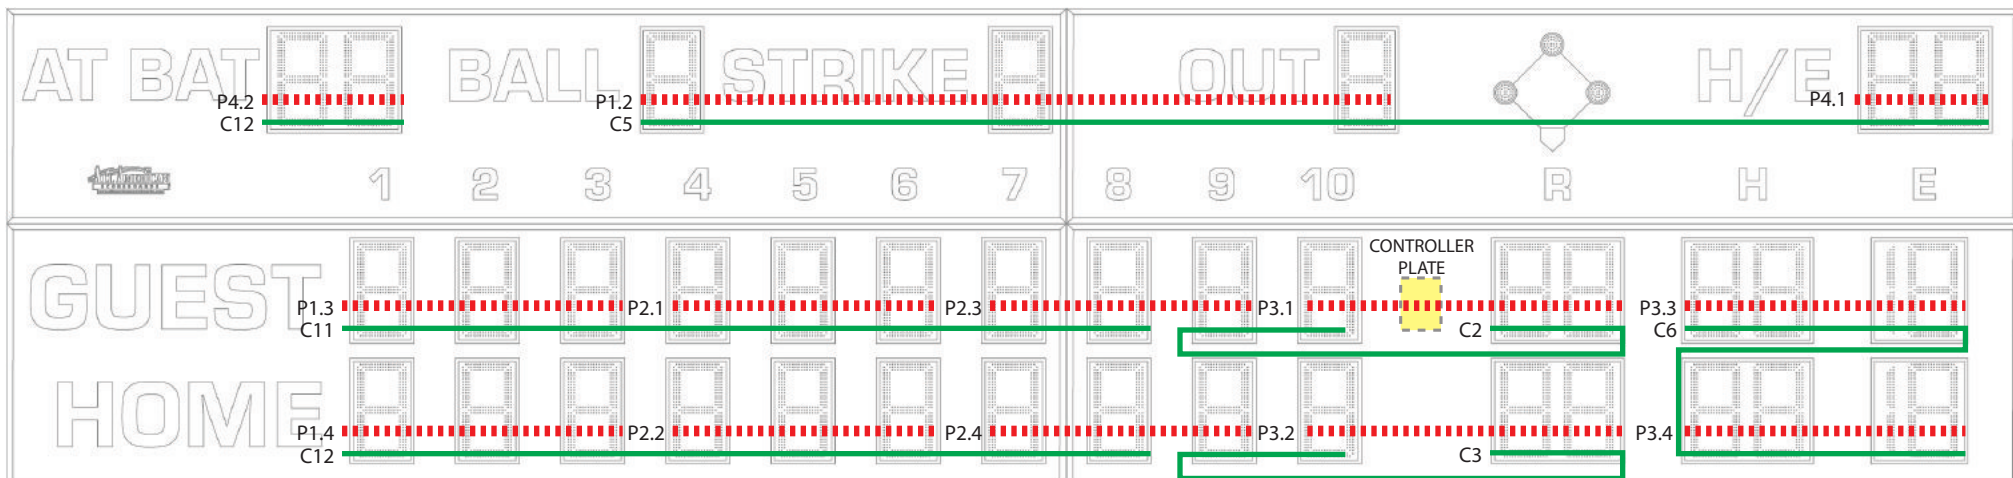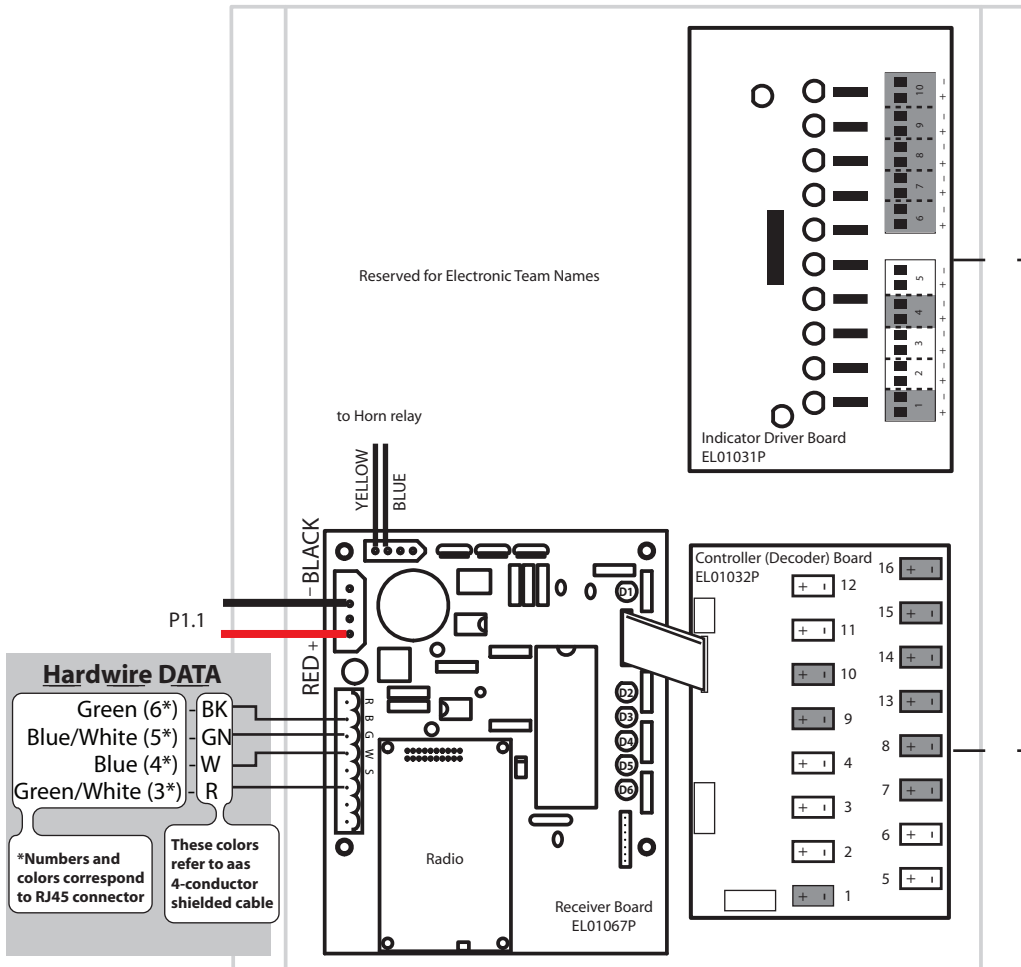

All digits are 21" Red. — = DATA - - - - - = 10.5VDC POWER

115 VAC / 60 Hz - 11.5 Amps

rev. 7.29.11