
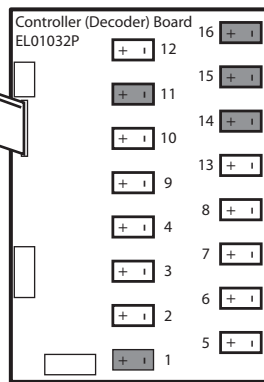
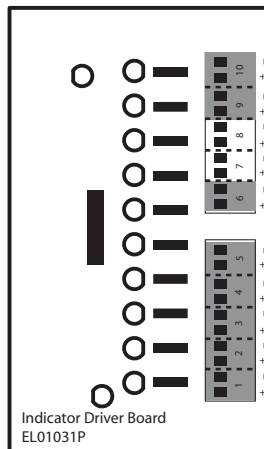


OUTPUTS

1. Home Team (top)
2. Home Team (bottom)
3. Guest Team (top)
4. Guest Team (bottom)

Data: Brown (+)

NOT USED
5-16

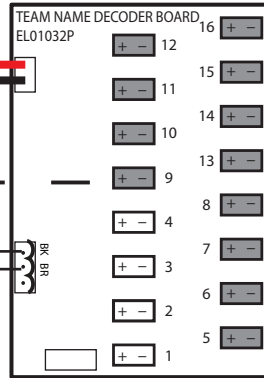


P1.1

Hardwire DATA

Green (6*) BK
Blue/White (5*) GN
Blue (4*) W
Green/White (3*) R

*Numbers and colors correspond to RJ45 connector

These colors refer to aas 4-conductor shielded cable

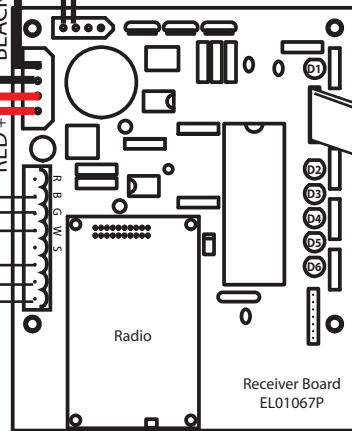

OUTPUTS

7. Hit
8. Error

NOT USED
1-6,9,10

OUTPUTS

2. Guest Runs, Inn 9,10
3. Home Runs, Inn 9,10
4. Indicators
5. Ball, Strike, Out
6. Guest Hits, Errors
Home Hits Errors
7. Guest Inn 1-4
8. Guest Inn 5-8
9. Home Inn 1-4
10. Home Inn 5-8
12. Batter
13. Speed Pitch

NOT USED
1,11,14-16

8341 LSTN Baseball Controller Plate

Scoreboard Type: 500

Power Supply Outputs:

POWER 1 (Quad):

P1.1 ≈ 0.66A P1.2 ≈ 3.90A

P1.3 ≈ 2.60A P1.4 ≈ 2.60A

POWER 2 (Quad):

P2.1 ≈ 4.38A P2.2 ≈ 4.38A

P2.3 ≈ 4.38A P2.4 ≈ 4.38A

POWER 3 (Quad):

P3.1 ≈ 4.38A P3.2 ≈ 3.28A

P3.3 ≈ 4.38A P3.4 ≈ 3.28A

POWER 4 (Quad):


P3.1 ≈ 4.00A P3.2 ≈ 4.00A

P3.3 ≈ 4.00A P3.4 ≈ 4.00A

"C" refers to controller board output. If Indicators are used, C4 data will go to the Indicator Driver Board and then to the digit(s).

"TN" refers to the Team Name Decoder Board.

Requires Receiver Program 210E or greater.

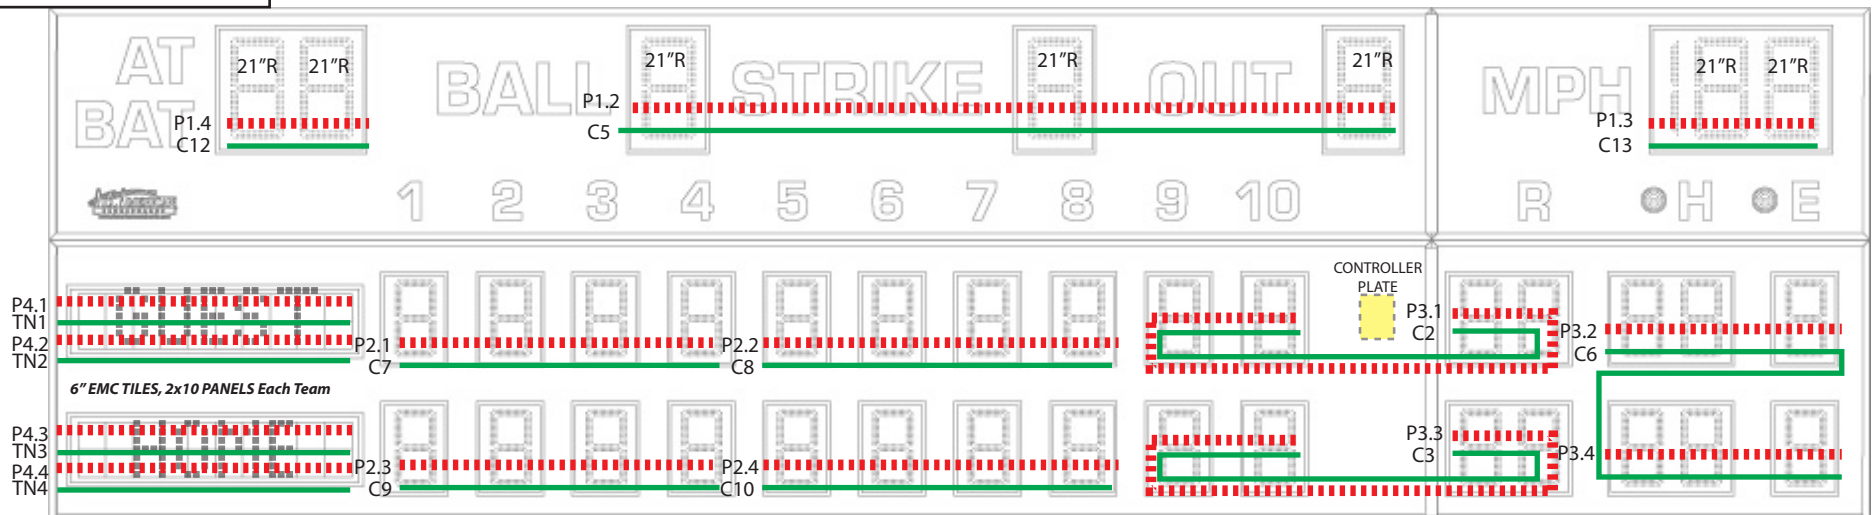

All Digits in lower panels are 16"Red. — = DATA - - - - - = 10.5VDC POWER

115 VAC / 60 Hz - 12.0 Amps