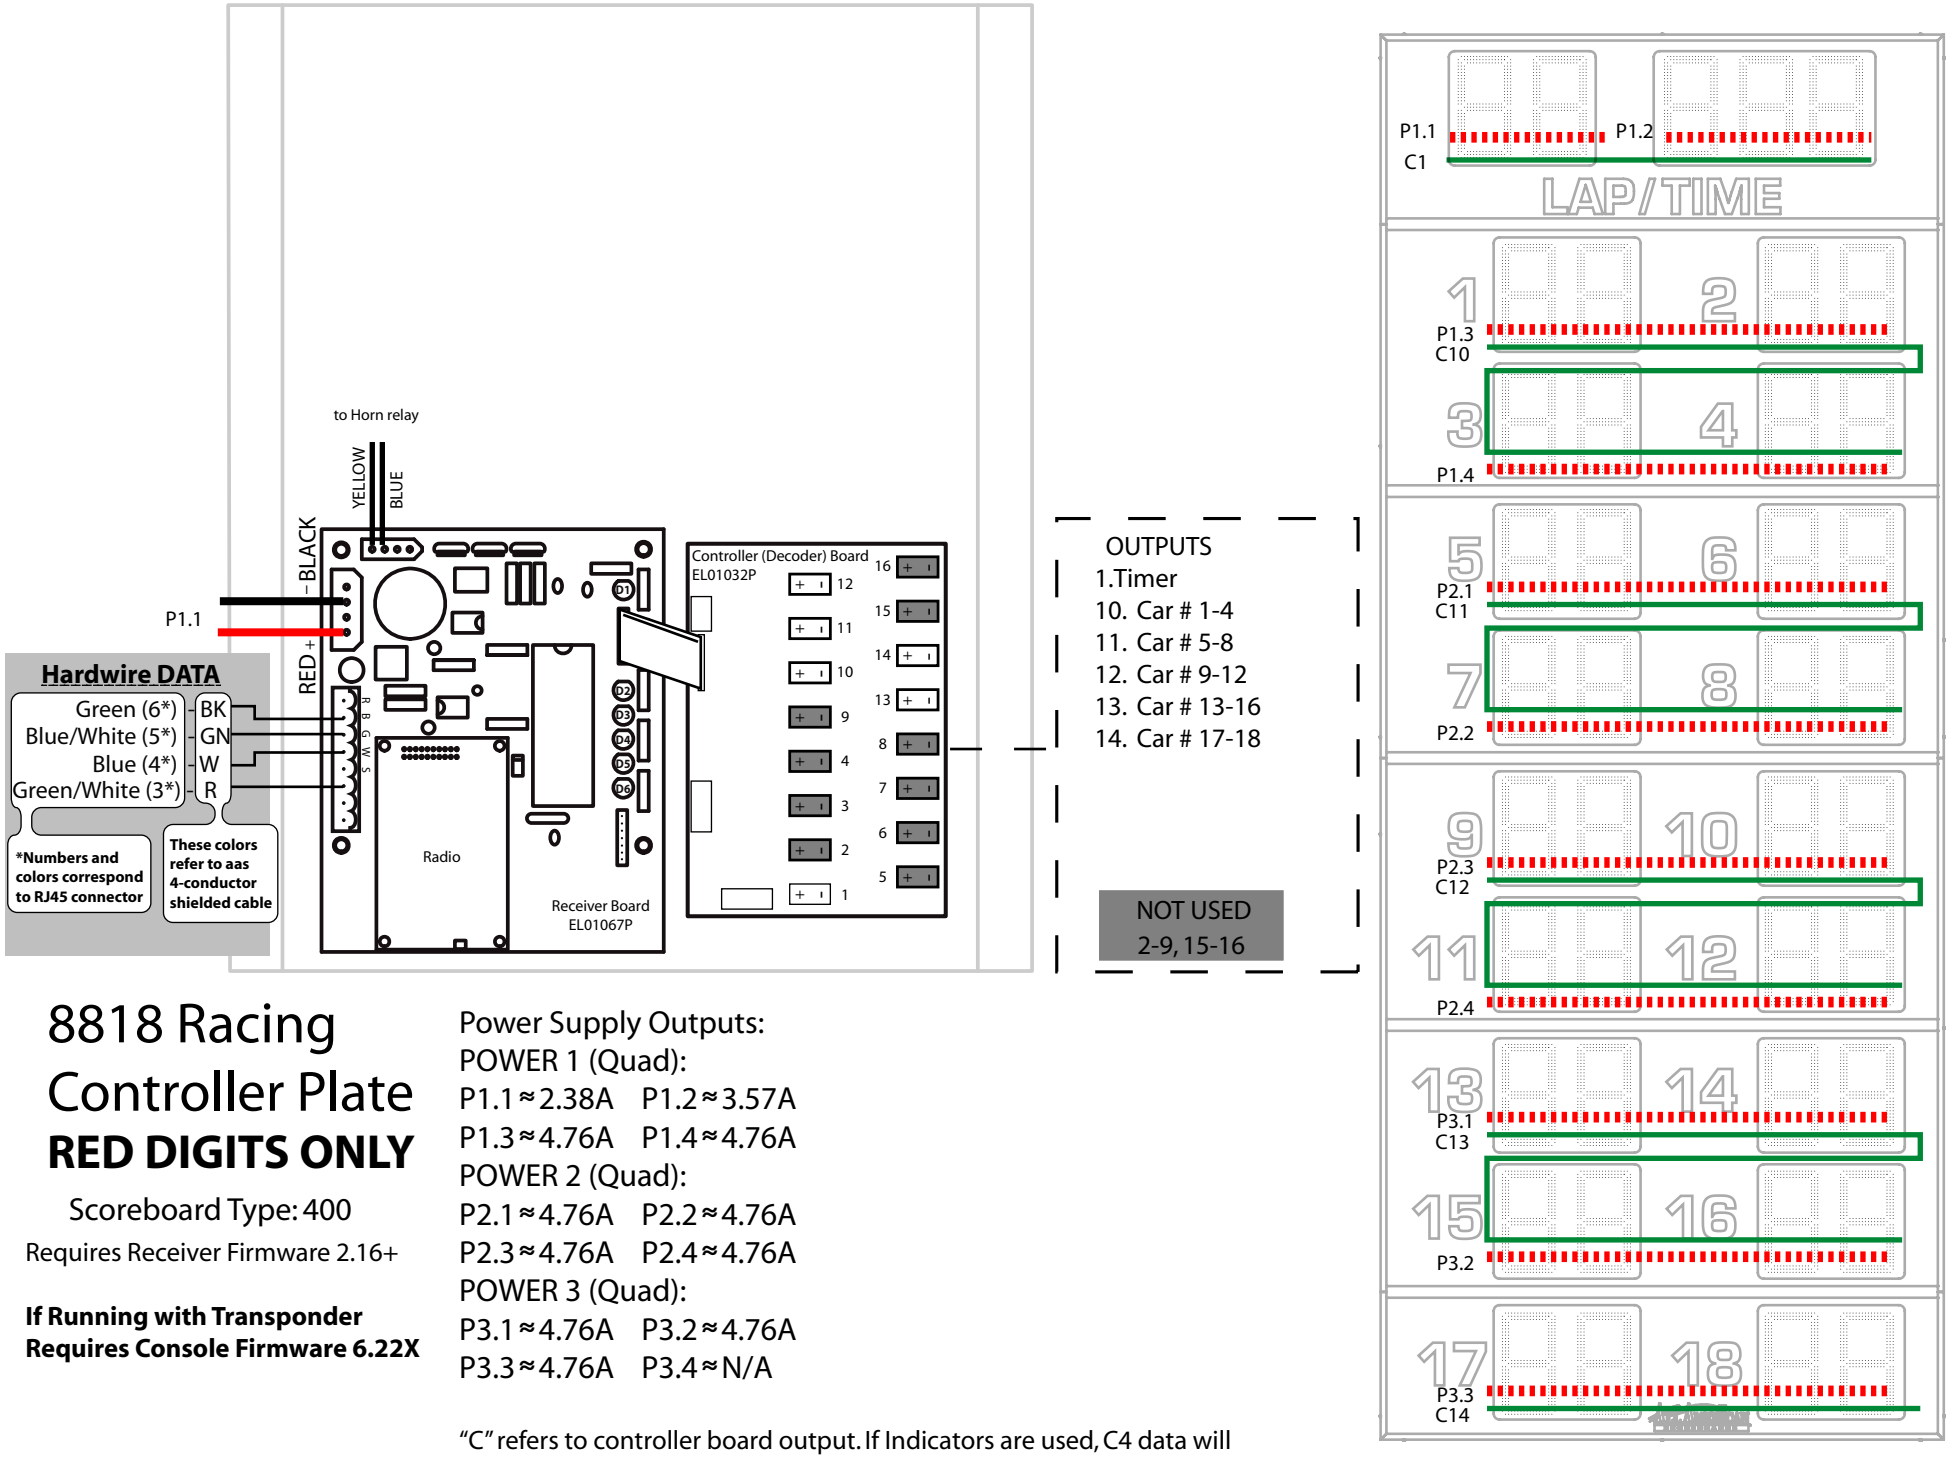

8818 Racing Controller Plate

RED DIGITS ONLY

Scoreboard Type: 400

Requires Receiver Firmware 2.16+

If Running with Transponder Requires Console Firmware 6.22X

Power Supply Outputs:

POWER 1 (Quad):

P1.1 ≈ 2.38A P1.2 ≈ 3.57A

P1.3 ≈ 4.76A P1.4 ≈ 4.76A

POWER 2 (Quad):

P2.1 ≈ 4.76A P2.2 ≈ 4.76A

P2.3 ≈ 4.76A P2.4 ≈ 4.76A

POWER 3 (Quad):

P3.1 ≈ 4.76A P3.2 ≈ 4.76A

P3.3 ≈ 4.76A P3.4 ≈ N/A

"C" refers to controller board output. If Indicators are used, C4 data will go to the Indicator Driver Board and then to the digit(s).

All Digits are 18" Red.

NOT TO BE USED WITH AMBER DIGITS.

= DATA = 10.5VDC POWER

115 VAC / 60 Hz - 9.0 Amps

rev. 4.16.14