


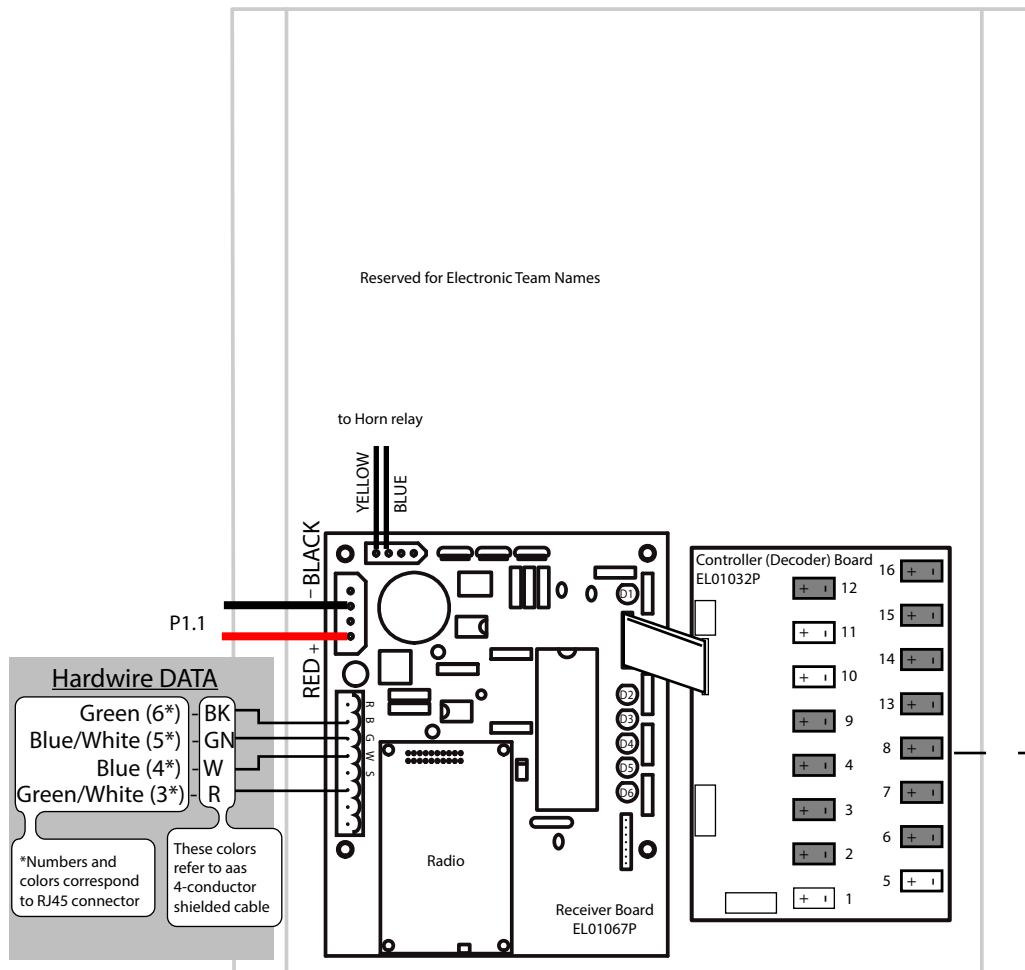

OUTPUTS

- 1.Timer
- 5. Position 1-5
- 8. Car # Pos 1-4/6-8
- 9. Car # Pos 5/10

NOT USED

2-4, 6-9, 12-16

8820 Racing Controller Plate

Scoreboard Type: 400

Requires Receiver Firmware 2.11

If Running with Transponder
Requires Console Firmware 6.2X

Power Supply Outputs:

POWER 1 (Quad):

P1.1 ≈ 0.74A P1.2 ≈ 2.60A


P1.3 ≈ 2.60A P1.4 ≈ 3.90A

POWER 2 (Quad):

P2.1 ≈ 3.90A P2.2 ≈ 3.90A

P2.3 ≈ 3.90A P2.4 ≈ 4.27A

"C" refers to controller board output. If
Indicators are used, C4 data will go to the
Indicator Driver Board and then to the
digit(s).

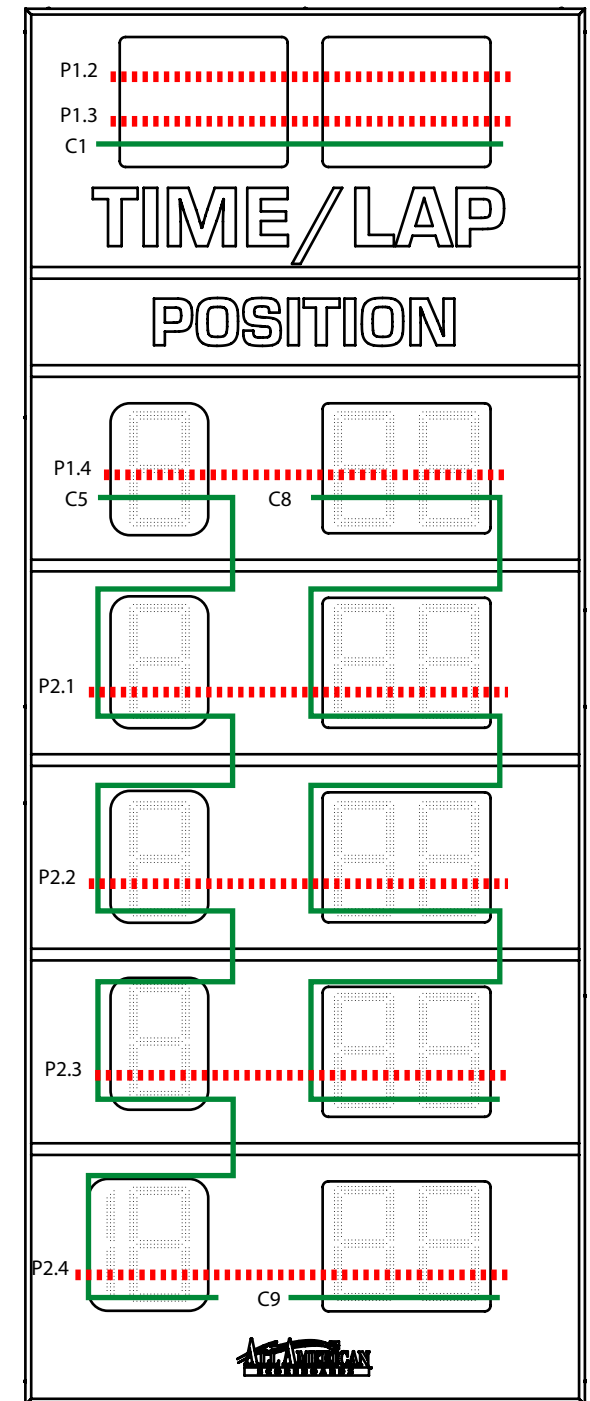

All Digits are 21" Red.

— = DATA = 10.5VDC POWER

115 VAC / 60 Hz - 6.0 Amps

rev. 3/27/2020