


**OUTDOOR SCOREBOARD**

**8325LS**

Line Score Baseball

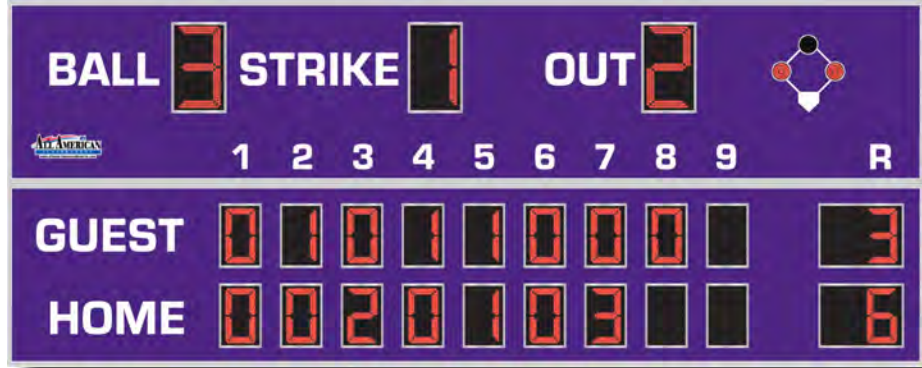

|                                       |   |
|---------------------------------------|---|
| <b>OVERALL DIMENSION</b>              | 8' high x 20' wide x 4.75" deep.  |
| <b>INFORMATION DISPLAYED</b>          | Home Line Score, Guest Line Score, Ball, Strike, Out, Runs, On Base   |
| <b>DIGITS</b>                         | Bright Red, 7-Segment LEDs.   |
| <b>SCORING</b>                        | 14" High Digits, Inning shall register 0-9. Runs shall register 0-99.   |
| <b>BALL</b>                           | 21" High Digits, Shall Register 1-3.  |
| <b>STRIKE</b>                         | 21" High Digits, Shall Register 1-2.  |
| <b>OUT</b>                            | 21" High Digits, Shall Register 1-2.  |
| <b>RUNNERS ON BASE</b>                | 4" Bulls Eye, Displays runners on first, second and/or third base.  |
| <b>CAPTIONS</b>                       | White vinyl letters.  |
| <b>CONSTRUCTION</b>                   | 4" extruded aluminum case, .093" thick. Face panels are 22 GA Galvaneal, finished in choice of colors (Black, Dark Blue, Bright Blue, Violet, Maroon, Red, Dark Green, Green, custom colors available).   |
| <b>ELECTRONICS</b>                    | 100% solid state, microprocessor controlled system.   |
| <b>SERVICING</b>                      | Front access for ease of servicing. Plug in modules for ease of replacement.  |
| <b>MICROPROCESSOR CONTROL CONSOLE</b> | Extruded Aluminum, high impact low profile microprocessor control console, latest state of the art, user friendly. Size: 13.25" wide x 5" high x 9" deep. Weights: 6 lbs. Microprocessor to be supplied with 25 feet of cable (hardwire). Microprocessor control console with membrane keyboard provides for direct entry of all information. Radio Control is available. |
| <b>JUNCTION BOX</b>                   | One junction box 5" x 3" with cover and plug. (Hardwire)  |
| <b>DATA CABLE</b>                     | Twisted pair, direct burial, RJ45.  |
| <b>POWER REQUIREMENTS</b>             | 115 VAC, 60 Hz. Minimum one 20A circuit is recommended.   |
| <b>INSTALLATION</b>                   | May be installed on three posts. Mounting brackets are supplied with scoreboard.  |
| <b>WEIGHT</b>                         | Net 655 lbs. / Shipping 855 lbs.  |
| <b>WARRANTY</b>                       | Five year guarantee against defects in materials and workmanship. Factory repair service for parts in warranty. Union label.  |