


**OUTDOOR SCOREBOARD**  
**8389**  
Baseball

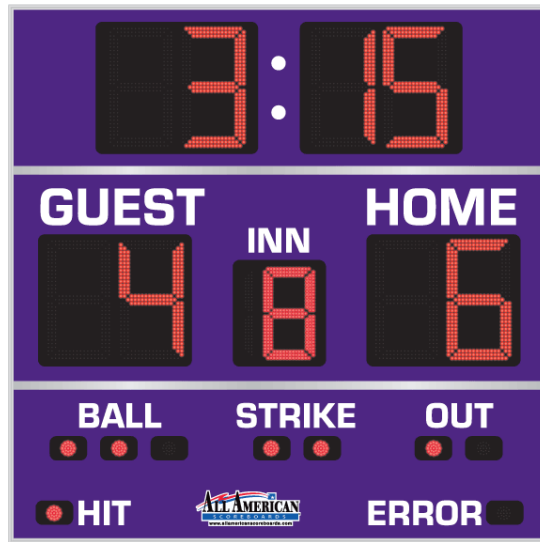

|                                       |   |
|---------------------------------------|---|
| <b>OVERALL DIMENSION</b>              | 8' high x 8' wide x 4.75" deep.   |
| <b>INFORMATION DISPLAYED</b>          | Home Score, Guest Score, Inning, Ball, Strike, Out, Hit/Error   |
| <b>DIGITS</b>                         | 7-Segment, Bright Red LEDs.   |
| <b>SCORING</b>                        | 18" High Digits, Shall register 0-99.   |
| <b>INNING</b>                         | 16" High Digits, Shall register 1-19.   |
| <b>TIME/GAME TIME</b>                 | 18" High Digits, Displays Game Time in Minutes or Time of Day.  |
| <b>BALL</b>                           | 3" Bulls Eye Indicators.  |
| <b>STRIKE</b>                         | 3" Bulls Eye Indicators.  |
| <b>OUT</b>                            | 3" Bulls Eye Indicators.  |
| <b>HIT/ERROR</b>                      | 3" Bulls Eye Indicators.  |
| <b>CAPTIONS</b>                       | White vinyl letters.  |
| <b>CONSTRUCTION</b>                   | 4" extruded aluminum case, .093" thick. Face panels made from shatter resistant polycarbonate (Black, Dark Blue, Bright Blue, Violet, Maroon, Red, Dark Green, Green, custom colors available).   |
| <b>ELECTRONICS</b>                    | 100% solid state, microprocessor controlled system.   |
| <b>SERVICING</b>                      | Front access for ease of servicing. Plug in modules for ease of replacement.  |
| <b>MICROPROCESSOR CONTROL CONSOLE</b> | Extruded Aluminum, high impact low profile microprocessor control console, latest state of the art, user friendly. Size: 13.25" wide x 5" high x 9" deep. Weights: 6 lbs. Microprocessor to be supplied with 25 feet of cable (hardwire). Microprocessor control console with membrane keyboard provides for direct entry of all information. Radio Control is available. |
| <b>JUNCTION BOX</b>                   | One junction box 5" x 3" with cover and plug. (Hardwire)  |
| <b>DATA CABLE</b>                     | Twisted pair, direct burial RJ45 Connectors.  |
| <b>POWER REQUIREMENTS</b>             | 115 VAC, 60 Hz Minimum one 20A circuit is recommended.  |
| <b>INSTALLATION</b>                   | May be installed on two posts. Mounting brackets are supplied with scoreboard.  |
| <b>WEIGHT</b>                         | Net 210 lbs. / Shipping 260 lbs.  |
| <b>WARRANTY</b>                       | Five year guarantee against defects in materials and workmanship. Factory repair service for parts in warranty. Union label.  |