


INDOOR SCOREBOARD
8266
Basketball

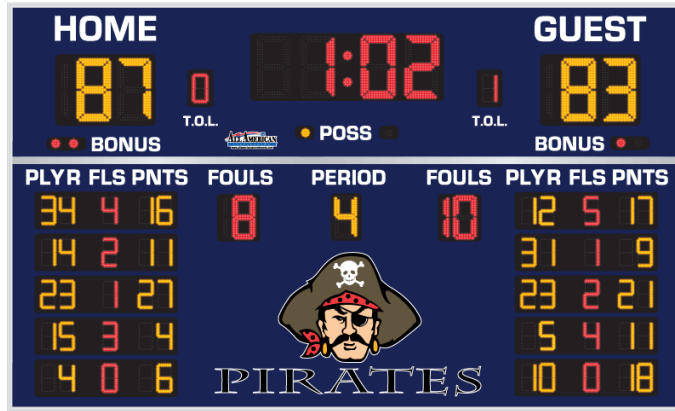

OVERALL DIMENSION	6'6"high x 11' wide x 5" deep.
INFORMATION DISPLAYED	Game Time, Home and Guest Score, Period, Time Outs Left, Fouls, Double Bonus, Possession, Player Stats
DIGITS	Bright Red and Amber, 7-Segment LEDs.
GAME TIME	12" High Red Digits, Shall register 0:00 - 99:59, 1/10 second capable.
SCORE	12" High Amber Digits, Shall register 0-199.
PERIOD	8" High Amber Digits, Shall register 1-4, 0.
T.O.L.	5" High Red Digits, Shall Register 1-9.
FOULS	8" High Red Digits, Shall Register 1-19.
PLAYER NUMBER	5" High Amber Digits, Shall Register 00-99.
PLAYER FOUL	5" High Red Digits, Shall register 0-9.
PLAYER POINTS	5" High Amber Digits, Shall register 0-9.
POSSESSION	Indicated by 2" Amber LED Indicators.
BONUS / DOUBLE BONUS	Indicated by 2" Red LED Indicators.
CAPTIONS	White vinyl letters.
CONSTRUCTION	5" extruded aluminum frame, .093" thick. Face panels made from shatter resistant polycarbonate (Black, Navy, Blue, Bright Blue, Violet, Maroon, Red, Dark Green, Green, custom colors available).
ELECTRONICS	100% solid state, microprocessor controlled system.
SERVICING	Front access for ease of servicing. Plug in modules for ease of replacement.
MICROPROCESSOR CONTROL CONSOLE	Extruded Aluminum, high impact low profile microprocessor control console, latest state of the art, user friendly. Size: 13.25" wide x 5" high x 9" deep. Weight: 6 lbs. Microprocessor to be supplied with 25 feet of cable (hardwire). Microprocessor control console with membrane keyboard provides for direct entry of all information. Radio Control is available.
JUNCTION BOX	One junction box 5" x 3" with cover and plug. (Hardwire)
DATA CABLE	Twisted pair, direct burial, RJ45 Connectors.
POWER REQUIREMENTS	120VAC. Minimum one 20A circuit is recommended.
INSTALLATION	May be mounted to nearly any wall surface.
WEIGHT	Net 250 lbs / Shipping 350 lbs.
WARRANTY	Five year guarantee against defects in materials and workmanship. Factory repair service for parts in warranty. Union label.