


**SCOREBOARDS™**  
**OUTDOOR SCOREBOARD**  
**8420 FOOTBALL**

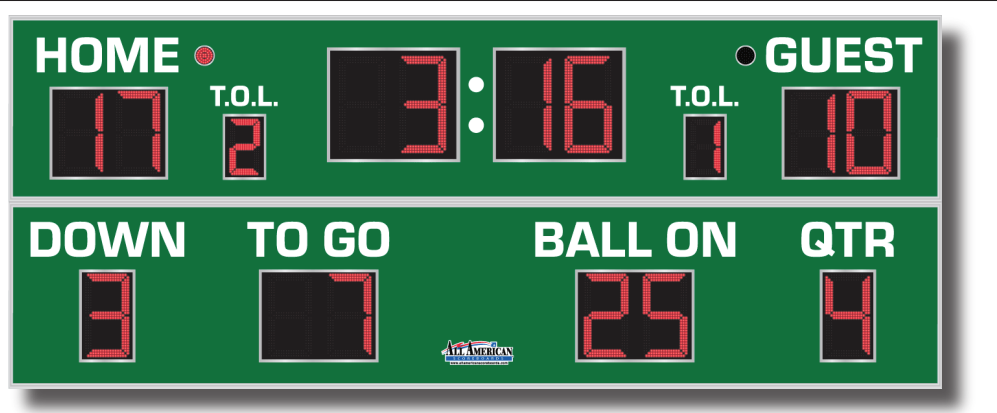

<b>OVERALL DIMENSION</b>	8' high x 20' wide x 4.75" deep.
<b>INFORMATION DISPLAYED</b>	Game Time, Home Score, Guest Score, Time Outs Left, Down, To Go, Ball On, Quarter
<b>DIGITS</b>	Bright Red, 7-Segment LEDs
<b>TIMER</b>	24" High Digits, Shall register 0:00 - 99:59
<b>SCORING</b>	21" High Digits, Shall register 0-99.
<b>QUARTER</b>	21" High Digits, Shall register 1-4.
<b>DOWN</b>	21" High Digits, Shall register 1-4.
<b>TO GO</b>	21" High Digits, Shall register 1-99.
<b>BALL ON</b>	21" High Digits, Shall register 1-99.
<b>TIME OUTS LEFT</b>	14" High Digits, Shall register 0-9.
<b>POSSESSION</b>	4" Red LED Bullseye indicators.
<b>CAPTIONS</b>	White vinyl captions.
<b>CONSTRUCTION</b>	4" extruded aluminum case, .093" thick. Face panels are 22 GA Galvaneal, finished in choice of colors (Black, Dark Blue, Bright Blue, Violet, Maroon, Red, Dark Green, Green, custom colors available).
<b>ELECTRONICS</b>	100% solid state, microprocessor controlled system.
<b>SERVICING</b>	Front access for ease of servicing. Plug in modules for ease of replacement.
<b>MICROPROCESSOR CONTROL CONSOLE</b>	Extruded Aluminum, high impact low profile microprocessor control console, latest state of the art, user friendly. Size: 13.25" wide x 5" high x 9" deep. Weights: 6 lbs. Microprocessor to be supplied with 25 feet of cable (hardwire). Microprocessor control console with membrane keyboard provides for direct entry of all information. Radio Control is available.
<b>JUNCTION BOX</b>	One junction box 5" x 3" with cover and plug. (Hardwire)
<b>DATA CABLE</b>	Two (2) twisted pair, direct burial.
<b>POWER REQUIREMENTS</b>	120VAC. One 20A circuit is recommended.
<b>INSTALLATION</b>	May be installed on two posts. Mounting brackets are supplied with scoreboard.
<b>WEIGHT</b>	Net 616 lbs. / Shipping 750 lbs.
<b>WARRANTY</b>	Five year guarantee against defects in materials and workmanship. Factory repair service for parts in warranty. Union label.