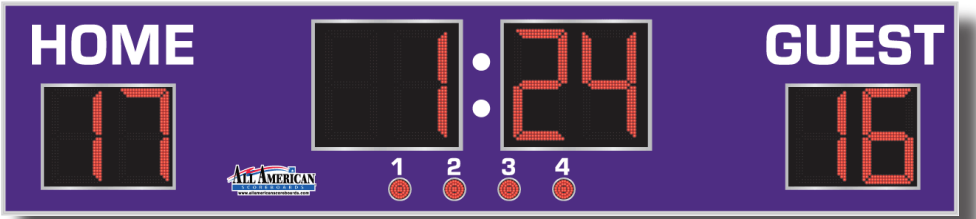


<p>OUTDOOR SCOREBOARD 8444 FOOTBALL</p>	
<p>OVERALL DIMENSION</p>	<p>4' high x 18' wide x 4.75" deep.</p>
<p>INFORMATION DISPLAYED</p>	<p>Game Time, Home Score, Guest Score, Period</p>
<p>DIGITS</p>	<p>7-Segment, Bright Red LEDs.</p>
<p>TIMER</p>	<p>24" High Digits, Shall register 0:00 - 99:59</p>
<p>SCORING</p>	<p>21" High Digits, Shall register 0-99.</p>
<p>PERIOD</p>	<p>4" Bullseye Indicators.</p>
<p>CAPTIONS</p>	<p>White vinyl letters.</p>
<p>CONSTRUCTION</p>	<p>4" extruded aluminum case, .093" thick. Face panels are 22 GA Galvaneal, finished in choice of colors (Black, Dark Blue, Bright Blue, Violet, Maroon, Red, Dark Green, Green, custom colors available).</p>
<p>ELECTRONICS</p>	<p>100% solid state, microprocessor controlled system.</p>
<p>SERVICING</p>	<p>Front access for ease of servicing. Plug in modules for ease of replacement.</p>
<p>MICROPROCESSOR CONTROL CONSOLE</p>	<p>Extruded Aluminum, high impact low profile microprocessor control console, latest state of the art, user friendly. Size: 13.25" wide x 5" high x 9" deep. Weights: 6 lbs. Microprocessor to be supplied with 25 feet of cable (hardwire). Microprocessor control console with membrane keyboard provides for direct entry of all information. Radio Control is available.</p>
<p>JUNCTION BOX</p>	<p>One junction box 5" x 3" with cover and plug. (Hardwire)</p>
<p>DATA CABLE</p>	<p>Twisted pair, direct burial, RJ45 Connectors.</p>
<p>POWER REQUIREMENTS</p>	<p>115 VAC, 60 Hz. Minimum one 20A circuit is recommended.</p>
<p>INSTALLATION</p>	<p>May be installed on two posts. Mounting brackets are supplied with scoreboard.</p>
<p>WEIGHT</p>	<p>Net 375 lbs. / Shipping 475 lbs.</p>
<p>WARRANTY</p>	<p>Five year guarantee against defects in materials and workmanship. Factory repair service for parts in warranty. Union label.</p>