

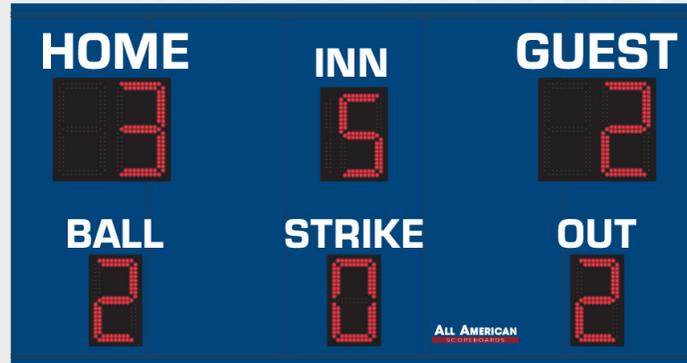
PRODUCT SPECIFICATIONS
BASEBALL SCOREBOARD

ALL AMERICAN

SCOREBOARDS

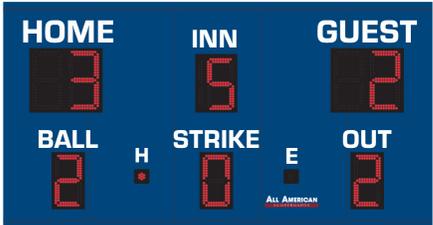
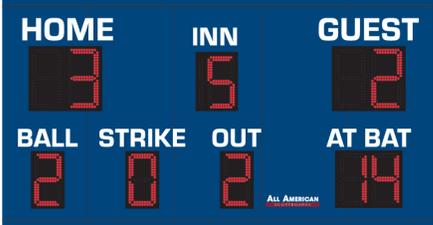
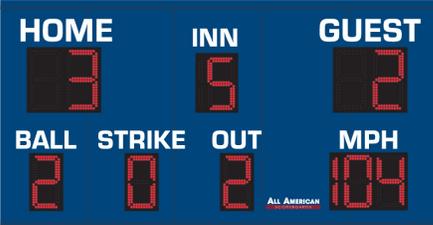


Available Options:



OVERALL DIMENSION	5' High x 10' Wide x 5" Depth. Additional 1.5" mounting flange on top and bottom. Style available in other sizes.
CONSTRUCTION	Fabricated 20 and 22 GA Powder Coated Galvanneal.
INFORMATION	Home & Guest Runs (16"), Inning up to 19 (14"), Ball, Strike, Out, Hit (14")
CAPTIONS	White vinyl captions: Home & Guest (6.25"), Inn, Ball, Strike, Out (5")
HORN	Optional 100dB or 110 dB horn available. Recommended to be wired at time of manufacture.
ELECTRONICS / DIGITS	100% solid state, microprocessor controlled system with locking connectors. Ultra bright, exposed Red LED digits.
SERVICING	Sign will be serviceable by removing the home score face to access components.
COMMUNICATION	Radio communication is standard using a 2.4 GHz Frequency hopping spread spectrum transceiver. Hardwire optional on scoreboard, recommended to be installed at time of manufacture.
POWER REQUIREMENTS	120VAC, 1.3 Amp. Installer to provide connection point or junction box to scoreboard. 20 Amp circuit recommended.
INSTALLATION	May be mounted to nearly any wall surface or a minimum of 2 posts/beams. Number and size of beams is dependent on soil condition and IBC wind loading requirements. Hardware supplied to mount by drilling through the scoreboard flange and I-beam. Pressure and additional clamping systems available. Pole/beam installations require supplied mounting bar on flange.
ESTIMATED WEIGHT	156 lbs.
WARRANTY	Five year guarantee against defects in materials and workmanship. Factory repair service for parts in warranty. Union Label. UL Certified.
ADDITIONAL OPTIONS MODEL NUMBER + ()	Graphic Area (G), Pitch Count (PC), At Bat (AB), Hit/Error (HE), or Pitch Speed(PS). Hit Error Indicators (HEI). Protective Lens Kit (PLK + Model Number). White, Green, Amber digits available (Red is standard).
AVAILABLE CONTROL CONSOLE (SOLD SEPARATELY)	MSC9000 (Multi-sport Desktop Console) Extruded Aluminum, high impact low profile microprocessor control console. 5" high x 10.25" wide x 9" deep. Weight: 4.3 lbs. Radio (1600 ft) is standard, simultaneous hardwire option included. Internal rechargeable battery. Switch between multiple sports by removing and replacing the slip sheet. HRBA9000 (Handheld Baseball Remote) 6.5" high x 3" wide x 1" deep. Radio (500 ft) is standard. Internal rechargeable battery.

PRODUCT SPECIFICATIONS
BA9106 OPTIONS

<p>BA9106HEI</p> <p>2" Hit/Error Indicators (HEI) indicators.</p>	
<p>BA9106AB</p> <p>14" AT BAT (AB) digits. Ball, Strike, Out shifted over to accommodate.</p> <p>AT BAT not editable with HRBA9000 Remote</p>	
<p>BA9106HE</p> <p>14" HIT ERROR (HE) digits. Ball, Strike, Out shifted over to accommodate.</p> <p>Error Position Number not editable with HRBA9000 Remote</p>	
<p>BA9106PC</p> <p>14" PITCH COUNT (PC) digits (up to 199). Ball, Strike, Out shifted over to accommodate.</p>	
<p>BA9106PS</p> <p>14" PITCH SPEED (PS) digits (up to 199). Ball, Strike, Out shifted over to accommodate.</p> <p>Pitch Speed not available with HRBA9000 Remote</p>	
<p>BA9106G</p> <p>Approx. 2'x3.5' Graphics Area (G) added. Ball, Strike, Out shifted over to accommodate.</p>	
<p>PLK + MODEL NUMBER</p> <p>Protective Lenses Installed in front of each digit assembly.</p>	