

030-00109



Pin 1

030-00104




Pin 1

Board Type: 210

QTY	Ref	Item Number	Description
4'	1	025-00046	WIRE,PVC 18AWG 300V TWSTD,O/P
6'	2	025-00099	WIRE,PVC 18AWG 300V TWSTD,
48'	3	025-00057	WIRE,TWSTD,18AWG,O/V BLKJACKET
48'	4	W100134P	CABLE,18/2 R/B GR Y JKT 105C
10	C1	030-00109	Plug, 8PIN, 5.08mm,BLK/ORG
5	C2	030-00104	Plug, 2PIN, 2.08mm,BLK/ORG
1	P1	062-00189	PWRSPLY,24V,96W
1	5	800118	WIRE,PVC 18AWG 300VSTR VIOLET
72	1	030-00112	BULK_FERRULE,.75/.14MM WHT
2	1	030-00113	TWIN_FERRULE,.75/.19MM WHT

Cable specification [length (cable reference)]

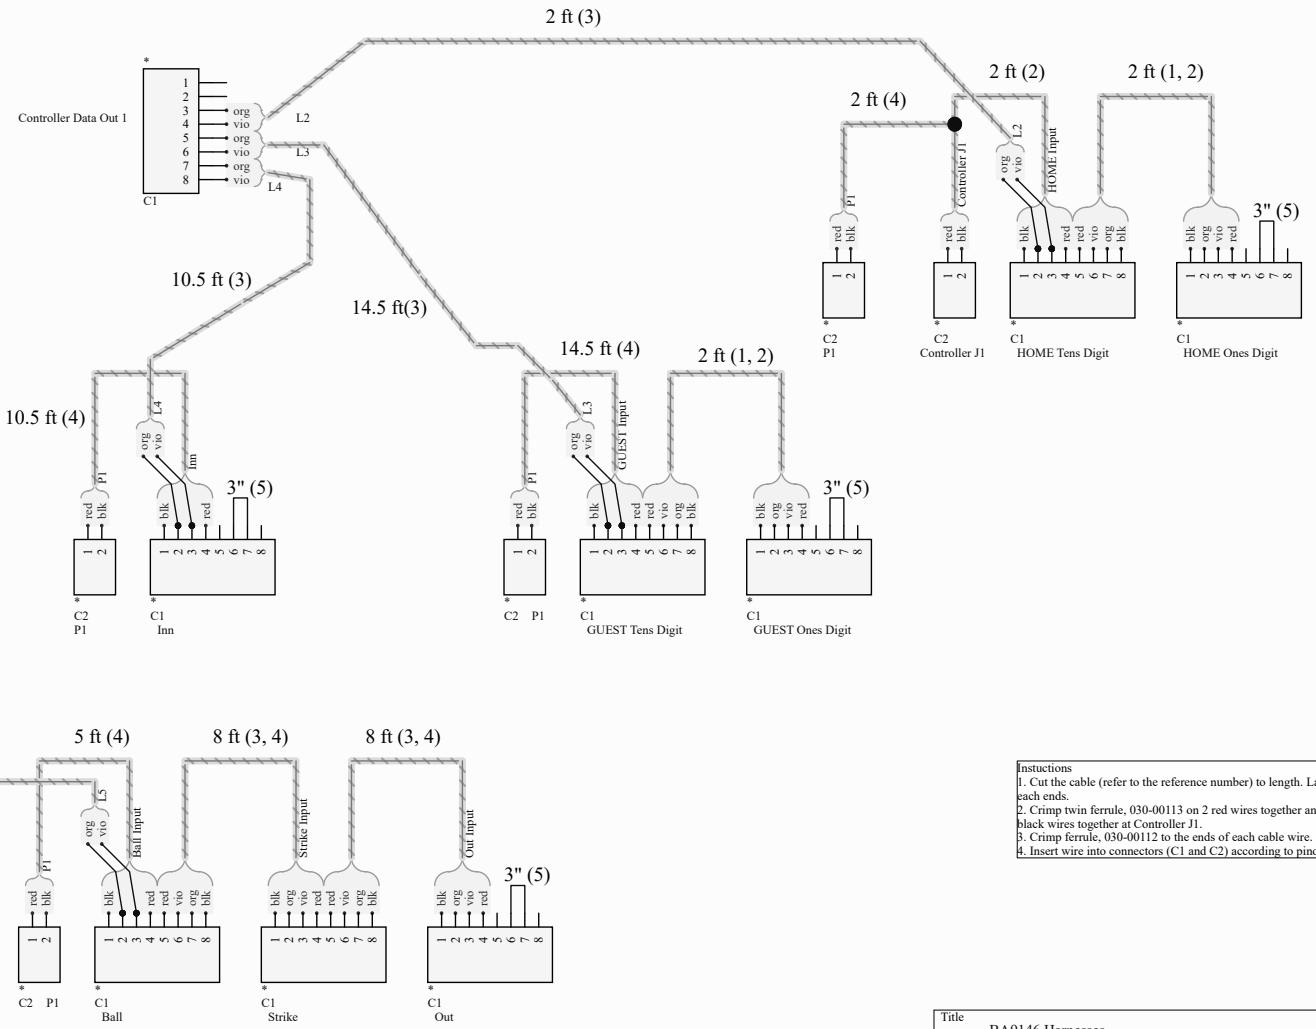

Instructions
 1. Cut the cable (refer to the reference number) to length. Label each ends.
 2. Crimp twin ferrule, 030-00113 on 2 red wires together and 2 black wires together at Controller J1.
 3. Crimp ferrule, 030-00112 to the ends of each cable wire.
 4. Insert wire into connectors (C1 and C2) according to pinout.