


QTY	Ref	Item Number	Description
8'	1	025-00046	WIRE,PVC 18AWG 300V TWSTD,O/P
8'	2	025-00099	WIRE,PVC 18AWG 300V TWSTD,
51.5'	3	025-00057	WIRE,TWSTD,18AWG,O/V BLKJACKET
53.5'	4	W100134P	CABLE,18/2 R/B GR Y JKT 105C
12	C1	030-00109	Plug, 8PIN, 5.08mm,BLK/ORG
5	C2	030-00104	Plug, 2PIN, 2.08mm,BLK/ORG
1	P1	062-00189	PWRSPLY,24V,96W
1	5	800118	WIRE,PVC 18AWG 300VSTR VIOLET
88	1	030-00112	BULK_FERRULE,.75/,14MM WHT
2	1	030-00113	TWIN_FERRULE,.75/,19MM WHT

Cable specification [length (cable reference)]

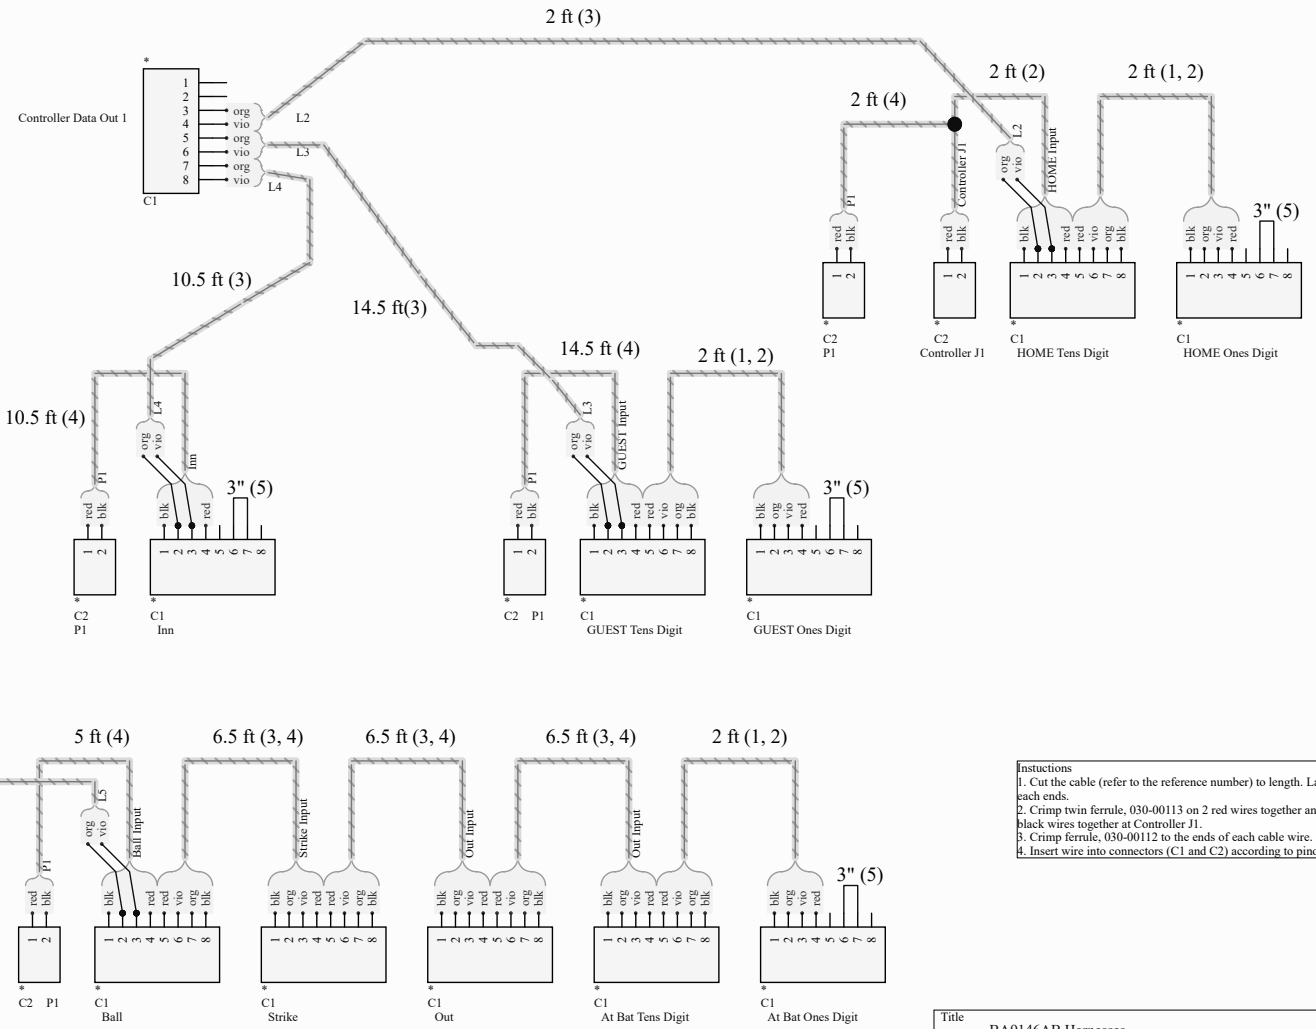

**Instructions**  
 1. Cut the cable (refer to the reference number) to length. Label each end.  
 2. Crimp twin ferrule, 030-00113 on 2 red wires together and 2 black wires together at Controller J1.  
 3. Crimp ferrule, 030-00112 to the ends of each cable wire.  
 4. Insert wire into connectors (C1 and C2) according to pinout.

Title BA9146AB Harnesses  
**ALL AMERICAN**  
**SCOREBOARDS**