


MULTI-SPORT & BASEBALL PITCH TIMER

OUTDOOR SCOREBOARD
TM9043
3-DIGIT TIMER

FOR 4-DIGIT VERSION, SEE TM9054

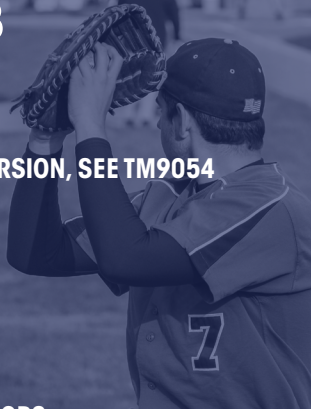

STANDARD COLORS (CUSTOM COLORS AVAILABLE)



OVERALL DIMENSION	2'4" High x 4' Wide x 5" Depth. Style available in other sizes.
CONSTRUCTION	Fabricated 20 and 22 GA Powder Coated Galvanneal.
INFORMATION	PITCH TIMER (18" Red).
CAPTIONS	None.
HORN	Not Included. 100 dB Resonating and 110 dB external trumpet horn available, recommended to be wired at time of manufacture.
ELECTRONICS / DIGITS	100% solid state, microprocessor controlled system with locking connectors. Ultra bright, exposed Red LED digits.
SERVICING	Sign will be serviceable by removing the timer digit pan to access components.
COMMUNICATION	Radio communication is standard using a 2.4 GHz Frequency hopping spread spectrum transceiver. Hardwire optional on scoreboard, recommended to be installed at time of manufacture.
POWER REQUIREMENTS	120VAC, 1.3 Amp. Installer to provide connection point or junction box to scoreboard. 20 Amp circuit recommended.
INSTALLATION	May be mounted to nearly any wall surface or a minimum of 2 posts/ beams using the Unistrut that is mounted to the top and bottom backs of the scoreboard. Number and size of beams is dependent on soil condition and IBC wind loading requirements. Hardware supplied to pressure mount to I-Beams.
ESTIMATED WEIGHT	52 lbs.
WARRANTY	Five year guarantee against defects in materials and workmanship. Factory repair service for parts in warranty. Union Label. UL Certified.
ADDITIONAL OPTIONS MODEL NUMBER + ()	Protective Lens Kit (PLK + Model Number). White, Green, Amber digits available (Red is standard). Deluxe Trim (different colored powdercoated top and bottom caps).
AVAILABLE CONTROL CONSOLE (SOLD SEPARATELY)	MSC9000 (Multi-sport Desktop Console) Extruded Aluminum, high impact low profile microprocessor control console. 5" high x 10.25" wide x 9" deep. Weight: 4.3 lbs. Radio (1600 ft) is standard, simultaneous hardwire option included. Internal rechargeable battery. Switch between multiple sports by removing and replacing the slip sheet. HRBA9000 (Handheld Baseball Remote) 6.5" high x 3" wide x 1" deep. Radio (500 ft) is standard. Internal rechargeable battery. All other remotes will also work for the game time.


MULTI-SPORT & BASEBALL PITCH TIMER



OUTDOOR SCOREBOARD
TM9053
3-DIGIT TIMER

FOR 4-DIGIT VERSION, SEE TM9064

STANDARD COLORS (CUSTOM COLORS AVAILABLE)

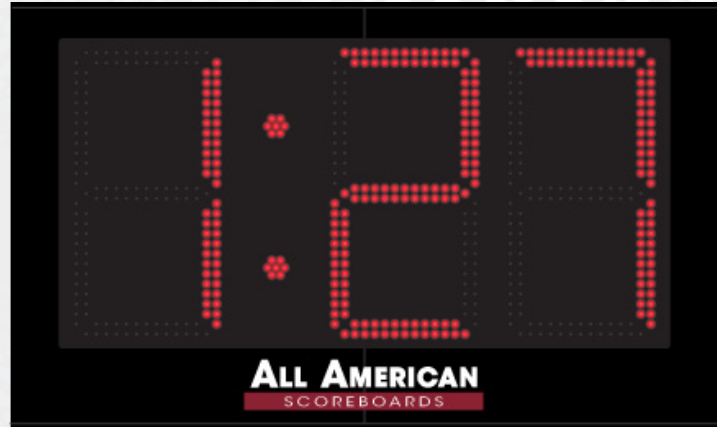

OVERALL DIMENSION	3' High x 5' Wide x 5" Depth. Style available in other sizes.
CONSTRUCTION	Fabricated 20 and 22 GA Powder Coated Galvanneal.
INFORMATION	PITCH TIMER (24" Red).
CAPTIONS	None.
HORN	Not Included. 100 dB Resonating and 110 dB external trumpet horn available, recommended to be wired at time of manufacture.
ELECTRONICS / DIGITS	100% solid state, microprocessor controlled system with locking connectors. Ultra bright, exposed Red LED digits.
SERVICING	Sign will be serviceable by removing the timer digit pan to access components.
COMMUNICATION	Radio communication is standard using a 2.4 GHz Frequency hopping spread spectrum transceiver. Hardwire optional on scoreboard, recommended to be installed at time of manufacture.
POWER REQUIREMENTS	120VAC, 1.3 Amp. Installer to provide connection point or junction box to scoreboard. 20 Amp circuit recommended.
INSTALLATION	May be mounted to nearly any wall surface or a minimum of 2 posts/ beams using the Unistrut that is mounted to the top and bottom backs of the scoreboard. Number and size of beams is dependent on soil condition and IBC wind loading requirements. Hardware supplied to pressure mount to I-Beams.
ESTIMATED WEIGHT	70 lbs.
WARRANTY	Five year guarantee against defects in materials and workmanship. Factory repair service for parts in warranty. Union Label. UL Certified.
ADDITIONAL OPTIONS MODEL NUMBER + ()	Protective Lens Kit (PLK + Model Number). White, Green, Amber digits available (Red is standard). Deluxe Trim (different colored powdercoated top and bottom caps).
AVAILABLE CONTROL CONSOLE (SOLD SEPARATELY)	MSC9000 (Multi-sport Desktop Console) Extruded Aluminum, high impact low profile microprocessor control console. 5" high x 10.25" wide x 9" deep. Weight: 4.3 lbs. Radio (1600 ft) is standard, simultaneous hardwire option included. Internal rechargeable battery. Switch between multiple sports by removing and replacing the slip sheet. HRBA9000 (Handheld Baseball Remote) 6.5" high x 3" wide x 1" deep. Radio (500 ft) is standard. Internal rechargeable battery. All other remotes will also work for the game time.

MULTI-SPORT & BASEBALL PITCH TIMER

OUTDOOR SCOREBOARD
TM9054
4-DIGIT TIMER


FOR 3-DIGIT VERSION, SEE TM9043

STANDARD COLORS (CUSTOM COLORS AVAILABLE)



OVERALL DIMENSION	2'4" High x 5' Wide x 5" Depth. Style available in other sizes.
CONSTRUCTION	Fabricated 20 and 22 GA Powder Coated Galvanneal.
INFORMATION	GAME TIME/TIME of DAY or PITCH TIMER (18" Red).
CAPTIONS	None.
HORN	Not Included. 100 dB Resonating and 110 dB external trumpet horn available, recommended to be wired at time of manufacture.
ELECTRONICS / DIGITS	100% solid state, microprocessor controlled system with locking connectors. Ultra bright, exposed Red LED digits.
SERVICING	Sign will be serviceable by removing the timer digit pan to access components.
COMMUNICATION	Radio communication is standard using a 2.4 GHz Frequency hopping spread spectrum transceiver. Hardwire optional on scoreboard, recommended to be installed at time of manufacture.
POWER REQUIREMENTS	120VAC, 1.3 Amp. Installer to provide connection point or junction box to scoreboard. 20 Amp circuit recommended.
INSTALLATION	May be mounted to nearly any wall surface or a minimum of 2 posts/ beams using the Unistrut that is mounted to the top and bottom backs of the scoreboard. Number and size of beams is dependent on soil condition and IBC wind loading requirements. Hardware supplied to pressure mount to I-Beams.
ESTIMATED WEIGHT	66 lbs.
WARRANTY	Five year guarantee against defects in materials and workmanship. Factory repair service for parts in warranty. Union Label. UL Certified.
ADDITIONAL OPTIONS MODEL NUMBER + ()	Protective Lens Kit (PLK + Model Number). White, Green, Amber digits available (Red is standard). Deluxe Trim (different colored powdercoated top and bottom caps).
AVAILABLE CONTROL CONSOLE (SOLD SEPARATELY)	MSC9000 (Multi-sport Desktop Console) Extruded Aluminum, high impact low profile microprocessor control console. 5" high x 10.25" wide x 9" deep. Weight: 4.3 lbs. Radio (1600 ft) is standard, simultaneous hardwire option included. Internal rechargeable battery. Switch between multiple sports by removing and replacing the slip sheet. HRBA9000 (Handheld Baseball Remote) 6.5" high x 3" wide x 1" deep. Radio (500 ft) is standard. Internal rechargeable battery. All other remotes will also work for the game time.

MULTI-SPORT & BASEBALL PITCH TIMER

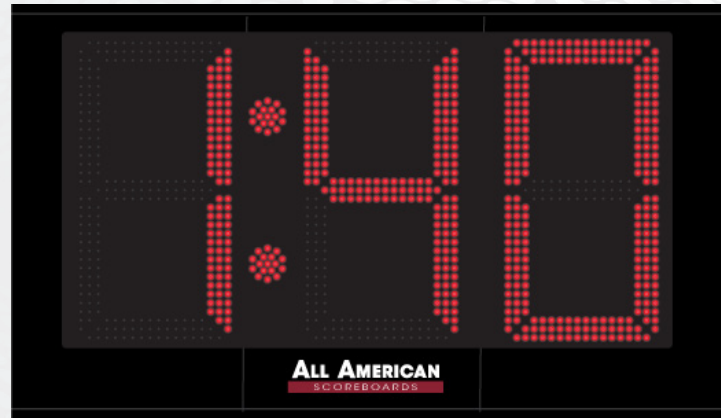


OVERALL DIMENSION	3'6" High x 6' Wide x 5" Depth. Style available in other sizes.
CONSTRUCTION	Fabricated 20 and 22 GA Powder Coated Galvanneal.
INFORMATION	PITCH TIMER (30" Red).
CAPTIONS	None.
HORN	Not Included. 100 dB Resonating and 110 dB external trumpet horn available, recommended to be wired at time of manufacture.
ELECTRONICS / DIGITS	100% solid state, microprocessor controlled system with locking connectors. Ultra bright, exposed Red LED digits.
SERVICING	Sign will be serviceable by removing the timer digit pan to access components.
COMMUNICATION	Radio communication is standard using a 2.4 GHz Frequency hopping spread spectrum transceiver. Hardwire optional on scoreboard, recommended to be installed at time of manufacture.
POWER REQUIREMENTS	120VAC, 1.3 Amp. Installer to provide connection point or junction box to scoreboard. 20 Amp circuit recommended.
INSTALLATION	May be mounted to nearly any wall surface or a minimum of 2 posts/ beams using the Unistrut that is mounted to the top and bottom backs of the scoreboard. Number and size of beams is dependent on soil condition and IBC wind loading requirements. Hardware supplied to pressure mount to I-Beams.
ESTIMATED WEIGHT	85 lbs.
WARRANTY	Five year guarantee against defects in materials and workmanship. Factory repair service for parts in warranty. Union Label. UL Certified.
ADDITIONAL OPTIONS MODEL NUMBER + ()	Protective Lens Kit (PLK + Model Number). White, Green, Amber digits available (Red is standard). Deluxe Trim (different colored powdercoated top and bottom caps).
AVAILABLE CONTROL CONSOLE (SOLD SEPARATELY)	MSC9000 (Multi-sport Desktop Console) Extruded Aluminum, high impact low profile microprocessor control console. 5" high x 10.25" wide x 9" deep. Weight: 4.3 lbs. Radio (1600 ft) is standard, simultaneous hardwire option included. Internal rechargeable battery. Switch between multiple sports by removing and replacing the slip sheet. HRBA9000 (Handheld Baseball Remote) 6.5" high x 3" wide x 1" deep. Radio (500 ft) is standard. Internal rechargeable battery. All other remotes will also work for the game time.

MULTI-SPORT & BASEBALL PITCH TIMER

OUTDOOR SCOREBOARD
TM9064
4-DIGIT TIMER

FOR 3-DIGIT VERSION, SEE TM9053

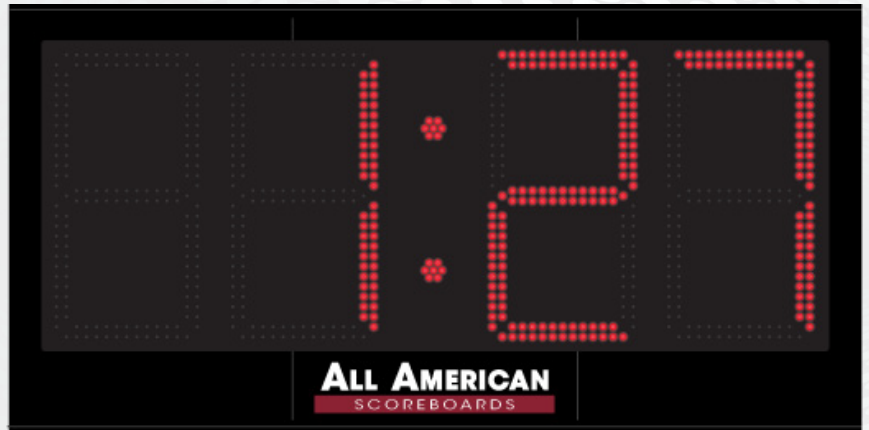

STANDARD COLORS (CUSTOM COLORS AVAILABLE)




OVERALL DIMENSION	3' High x 6' Wide x 5" Depth. Style available in other sizes.
CONSTRUCTION	Fabricated 20 and 22 GA Powder Coated Galvanneal.
INFORMATION	GAME TIME/TIME of DAY or PITCH TIMER (24" Red).
CAPTIONS	None.
HORN	Not Included. 100 dB Resonating and 110 dB external trumpet horn available, recommended to be wired at time of manufacture.
ELECTRONICS / DIGITS	100% solid state, microprocessor controlled system with locking connectors. Ultra bright, exposed Red LED digits.
SERVICING	Sign will be serviceable by removing the timer digit pan to access components.
COMMUNICATION	Radio communication is standard using a 2.4 GHz Frequency hopping spread spectrum transceiver. Hardwire optional on scoreboard, recommended to be installed at time of manufacture.
POWER REQUIREMENTS	120VAC, 1.3 Amp. Installer to provide connection point or junction box to scoreboard. 20 Amp circuit recommended.
INSTALLATION	May be mounted to nearly any wall surface or a minimum of 2 posts/ beams using the Unistrut that is mounted to the top and bottom backs of the scoreboard. Number and size of beams is dependent on soil condition and IBC wind loading requirements. Hardware supplied to pressure mount to I-Beams.
ESTIMATED WEIGHT	80 lbs.
WARRANTY	Five year guarantee against defects in materials and workmanship. Factory repair service for parts in warranty. Union Label. UL Certified.
ADDITIONAL OPTIONS MODEL NUMBER + ()	Protective Lens Kit (PLK + Model Number). White, Green, Amber digits available (Red is standard). Deluxe Trim (different colored powdercoated top and bottom caps).
AVAILABLE CONTROL CONSOLE (SOLD SEPARATELY)	MSC9000 (Multi-sport Desktop Console) Extruded Aluminum, high impact low profile microprocessor control console. 5" high x 10.25" wide x 9" deep. Weight: 4.3 lbs. Radio (1600 ft) is standard, simultaneous hardwire option included. Internal rechargeable battery. Switch between multiple sports by removing and replacing the slip sheet. HRBA9000 (Handheld Baseball Remote) 6.5" high x 3" wide x 1" deep. Radio (500 ft) is standard. Internal rechargeable battery. All other remotes will also work for the game time.

MULTI-SPORT & BASEBALL PITCH TIMER



OUTDOOR SCOREBOARD
TM9083
3-DIGIT TIMER

FOR 4-DIGIT VERSION, SEE TM9104

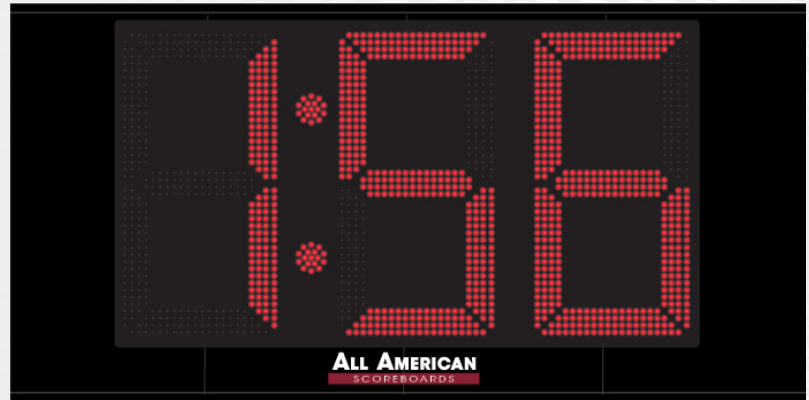


STANDARD COLORS (CUSTOM COLORS AVAILABLE)



OVERALL DIMENSION	4' High x 8' Wide x 5" Depth. Style available in other sizes.
CONSTRUCTION	Fabricated 20 and 22 GA Powder Coated Galvanneal.
INFORMATION	PITCH TIMER (36" Red).
CAPTIONS	None.
HORN	Not Included. 100 dB Resonating and 110 dB external trumpet horn available, recommended to be wired at time of manufacture.
ELECTRONICS / DIGITS	100% solid state, microprocessor controlled system with locking connectors. Ultra bright, exposed Red LED digits.
SERVICING	Sign will be serviceable by removing the timer digit pan to access components.
COMMUNICATION	Radio communication is standard using a 2.4 GHz Frequency hopping spread spectrum transceiver. Hardwire optional on scoreboard, recommended to be installed at time of manufacture.
POWER REQUIREMENTS	120VAC, 1.3 Amp. Installer to provide connection point or junction box to scoreboard. 20 Amp circuit recommended.
INSTALLATION	May be mounted to nearly any wall surface or a minimum of 2 posts/ beams using the Unistrut that is mounted to the top and bottom backs of the scoreboard. Number and size of beams is dependent on soil condition and IBC wind loading requirements. Hardware supplied to pressure mount to I-Beams.
ESTIMATED WEIGHT	135 lbs.
WARRANTY	Five year guarantee against defects in materials and workmanship. Factory repair service for parts in warranty. Union Label. UL Certified.
ADDITIONAL OPTIONS MODEL NUMBER + ()	Protective Lens Kit (PLK + Model Number). White, Green, Amber digits available (Red is standard). Deluxe Trim (different colored powdercoated top and bottom caps).
AVAILABLE CONTROL CONSOLE (SOLD SEPARATELY)	MSC9000 (Multi-sport Desktop Console) Extruded Aluminum, high impact low profile microprocessor control console. 5" high x 10.25" wide x 9" deep. Weight: 4.3 lbs. Radio (1600 ft) is standard, simultaneous hardwire option included. Internal rechargeable battery. Switch between multiple sports by removing and replacing the slip sheet. HRBA9000 (Handheld Baseball Remote) 6.5" high x 3" wide x 1" deep. Radio (500 ft) is standard. Internal rechargeable battery. All other remotes will also work for the game time.

MULTI-SPORT & BASEBALL PITCH TIMER

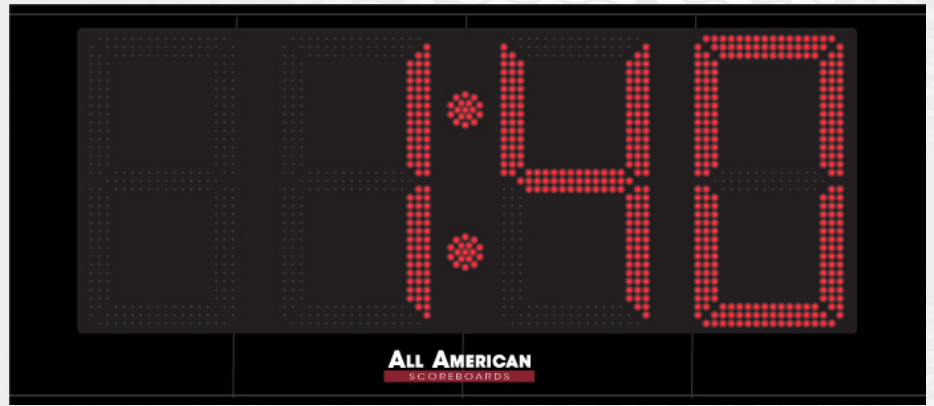


OVERALL DIMENSION	3'6" High x 8' Wide x 5" Depth. Style available in other sizes.
CONSTRUCTION	Fabricated 20 and 22 GA Powder Coated Galvanneal.
INFORMATION	GAME TIME/TIME of DAY or PITCH TIMER (30" Red).
CAPTIONS	None.
HORN	Not Included. 100 dB Resonating and 110 dB external trumpet horn available, recommended to be wired at time of manufacture.
ELECTRONICS / DIGITS	100% solid state, microprocessor controlled system with locking connectors. Ultra bright, exposed Red LED digits.
SERVICING	Sign will be serviceable by removing the timer digit pan to access components.
COMMUNICATION	Radio communication is standard using a 2.4 GHz Frequency hopping spread spectrum transceiver. Hardwire optional on scoreboard, recommended to be installed at time of manufacture.
POWER REQUIREMENTS	120VAC, 1.3 Amp. Installer to provide connection point or junction box to scoreboard. 20 Amp circuit recommended.
INSTALLATION	May be mounted to nearly any wall surface or a minimum of 2 posts/ beams using the Unistrut that is mounted to the top and bottom backs of the scoreboard. Number and size of beams is dependent on soil condition and IBC wind loading requirements. Hardware supplied to pressure mount to I-Beams.
ESTIMATED WEIGHT	105 lbs.
WARRANTY	Five year guarantee against defects in materials and workmanship. Factory repair service for parts in warranty. Union Label. UL Certified.
ADDITIONAL OPTIONS MODEL NUMBER + ()	Protective Lens Kit (PLK + Model Number). White, Green, Amber digits available (Red is standard). Deluxe Trim (different colored powdercoated top and bottom caps).
AVAILABLE CONTROL CONSOLE (SOLD SEPARATELY)	MSC9000 (Multi-sport Desktop Console) Extruded Aluminum, high impact low profile microprocessor control console. 5" high x 10.25" wide x 9" deep. Weight: 4.3 lbs. Radio (1600 ft) is standard, simultaneous hardwire option included. Internal rechargeable battery. Switch between multiple sports by removing and replacing the slip sheet. HRBA9000 (Handheld Baseball Remote) 6.5" high x 3" wide x 1" deep. Radio (500 ft) is standard. Internal rechargeable battery. All other remotes will also work for the game time.

MULTI-SPORT & BASEBALL PITCH TIMER

OUTDOOR SCOREBOARD
TM9104
4-DIGIT TIMER

FOR 3-DIGIT VERSION, SEE TM9083

STANDARD COLORS (CUSTOM COLORS AVAILABLE)

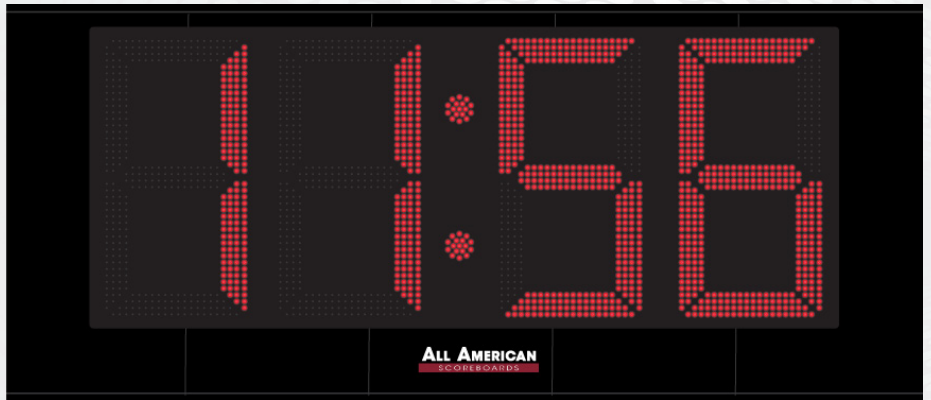

OVERALL DIMENSION	4'4" High x 10' Wide x 5" Depth. Style available in other sizes.
CONSTRUCTION	Fabricated 20 and 22 GA Powder Coated Galvanneal.
INFORMATION	GAME TIME/TIME of DAY or PITCH TIMER (36" Red).
CAPTIONS	None.
HORN	Not Included. 100 dB Resonating and 110 dB external trumpet horn available, recommended to be wired at time of manufacture.
ELECTRONICS / DIGITS	100% solid state, microprocessor controlled system with locking connectors. Ultra bright, exposed Red LED digits.
SERVICING	Sign will be serviceable by removing the timer digit pan to access components.
COMMUNICATION	Radio communication is standard using a 2.4 GHz Frequency hopping spread spectrum transceiver. Hardwire optional on scoreboard, recommended to be installed at time of manufacture.
POWER REQUIREMENTS	120VAC, 2.6 Amp. Installer to provide connection point or junction box to scoreboard. 20 Amp circuit recommended.
INSTALLATION	May be mounted to nearly any wall surface or a minimum of 2 posts/ beams using the Unistrut that is mounted to the top and bottom backs of the scoreboard. Number and size of beams is dependent on soil condition and IBC wind loading requirements. Hardware supplied to pressure mount to I-Beams.
ESTIMATED WEIGHT	180 lbs.
WARRANTY	Five year guarantee against defects in materials and workmanship. Factory repair service for parts in warranty. Union Label. UL Certified.
ADDITIONAL OPTIONS MODEL NUMBER + ()	Protective Lens Kit (PLK + Model Number). White, Green, Amber digits available (Red is standard). Deluxe Trim (different colored powdercoated top and bottom caps).
AVAILABLE CONTROL CONSOLE (SOLD SEPARATELY)	MSC9000 (Multi-sport Desktop Console) Extruded Aluminum, high impact low profile microprocessor control console. 5" high x 10.25" wide x 9" deep. Weight: 4.3 lbs. Radio (1600 ft) is standard, simultaneous hardwire option included. Internal rechargeable battery. Switch between multiple sports by removing and replacing the slip sheet. HRBA9000 (Handheld Baseball Remote) 6.5" high x 3" wide x 1" deep. Radio (500 ft) is standard. Internal rechargeable battery. All other remotes will also work for the game time.