



PRODUCT SPECIFICATIONS  
**BASEBALL SCOREBOARD**

**ALL AMERICAN**  
**SCOREBOARDS**®



**OUTDOOR SCOREBOARD  
 BA9066X2T2**

**STANDARD COLORS** (CUSTOM COLORS AVAILABLE)

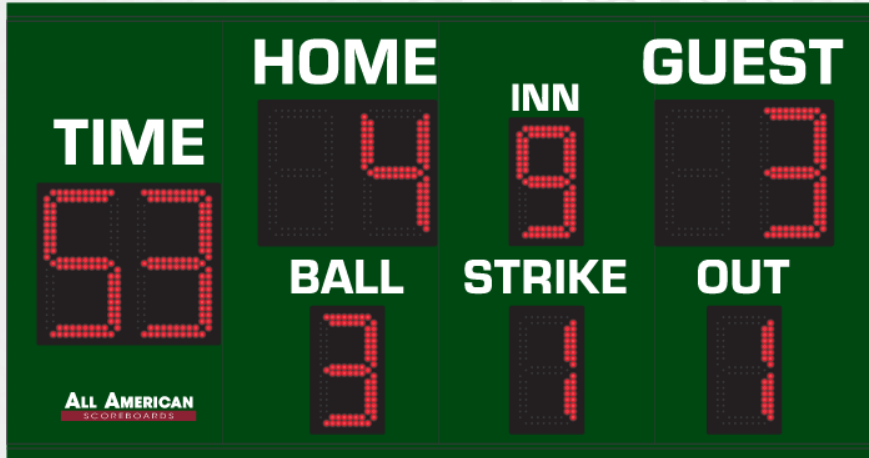


<b>OVERALL DIMENSION</b>	4' High x 8' Wide x 5" Depth. Additional 1.5" mounting flange on top and bottom. Style available in other sizes.
<b>CONSTRUCTION</b>	Fabricated 20 and 22 GA Powder Coated Galvanneal.
<b>INFORMATION</b>	2-Digit Game Timer (16"), Home & Guest Scores (14"), Inning, Ball, Strike, Out (12").
<b>CAPTIONS</b>	White vinyl captions: Timer, Home & Guest (5"), Inning (3"), Ball, Strike, Out (3.5").
<b>HORN</b>	Optional 100dB or 110 dB horn available. Recommended to be wired at time of manufacture.
<b>ELECTRONICS / DIGITS</b>	100% solid state, microprocessor controlled system with locking connectors. Ultra bright, exposed Red LED digits.
<b>SERVICING</b>	Sign will be serviceable by removing the home score face to access components.
<b>Communication</b>	Radio communication is standard using a 2.4 GHz Frequency hopping spread spectrum transceiver. Hardwire optional on scoreboard, recommended to be installed at time of manufacture.
<b>POWER REQUIREMENTS</b>	120VAC, 1.3 Amp. Installer to provide connection point or junction box to scoreboard. 20 Amp circuit recommended.
<b>INSTALLATION</b>	May be mounted to nearly any wall surface or a minimum of 2 posts/beams. Number and size of beams is dependent on soil condition and IBC wind loading requirements. Hardware supplied to mount by drilling through the scoreboard flange and I-beam. Pressure and additional clamping system available. Pole/beam installations require supplied mounting bar on flange.
<b>ESTIMATED WEIGHT</b>	132 lbs.
<b>WARRANTY</b>	Five year guarantee against defects in materials and workmanship. Factory repair service for parts in warranty. Union label. UL Certified.
<b>ADDITIONAL OPTIONS</b> MODEL NUMBER + ( )	Hit/Error Indicators (HEI), Protective Lens Kit (PLK + Model Number). White, Green, Amber digits available (Red is standard).
<b>AVAILABLE CONTROL CONSOLE</b> (SOLD SEPARATELY)	<b>MSC9000 (Multi-sport Desktop Console)</b> Extruded Aluminum, high impact low profile microprocessor control console. 5" high x 10.25" wide x 9" deep. Weight: 4.3 lbs. Radio (1600 ft) is standard, simultaneous hardwire option included. Internal rechargeable battery. Switch between multiple sports by removing and replacing the slip sheet. <b>HRBA9000 (Handheld Baseball Remote)</b> 6.5" high x 3" wide x 1" deep. Radio (500 ft) is standard. Internal rechargeable battery.

PRODUCT SPECIFICATIONS  
**BA9066 OPTIONS**

**BK9066X2T2HEI**

2" Red Hit/Error Indicators (HEI) added.

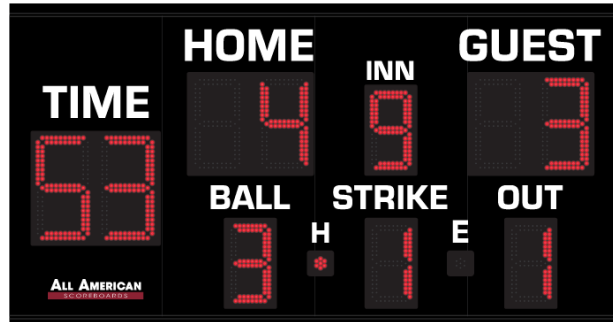

**PLK + MODEL NUMBER**

Protective Lenses Installed in front of each digit assembly.

